

## Specification/Data sheet


### UltraVent® Recirculating hood 62/102 Combi-Duo - USA/Canada



Article number: 60.74.974

#### Description

- The condensation technology in the UltraVent absorbs and dissipates steam. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

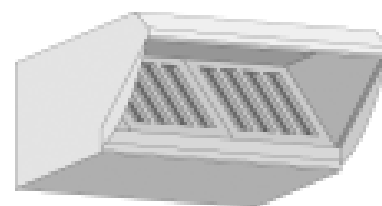

#### Special feature

- High extraction power
- Proximity door contact switch
- Automatic increase of extraction power when cooking cabinet door is opened
- Waste water discharge through the unit, no additional discharge require

#### Technical Info

- Connection: 100-125V 1 NAC 50/60 HZ
- Comes with 8'2" (2.5 m) power cord with 5-15 P plug
- Connected load: 450 W
- Extraction power: 165 - 335 ft³/min
- Operating noise level 2: 70 dBA
- Width: 42 3/8" (1076 mm)
- Height: 17 3/4" (450 mm)
- Depth: 56 1/8" (1427 mm)
- Weight: 176 lbs (80kg)
- Needs 18" (450 mm) clearance above

#### Notes

- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent 62/102 E condensation hood can be used for right and left hand door units. Supplied with installation options for both variants. The combination with a left-hinge door restricts the extraction function of the UltraVent.
- Not for use with RATIONAL VarioSmoker
- Can be added to any 62/102 electric RATIONAL unit built after 2005 with adapter (62: 60.72.433 / 102: 60.72.435)
- Grease filter left: 60.72.440
- Grease filter right: 60.72.441

#### Certificates and Listings

- Approved for UL 197 and 507 and C 22.2, CSA 22.2 No. 109 and CSA 22.2 No 113-15
- EPA 202

#### Material

- Stainless steel (CNS 1.4301 /CNS 304)

## Specification/Data sheet

## UltraVent® Recirculating hood 62/102 Combi-Duo - USA/Canada

