

Item:	
Quantity:	
Project:	

Electric Convection Ov

Models: ☐ RECOD-1 ☐ RECOD-2



Standard Features


- Accommodates full size sheet pans front to back and side to side
- 3 heating elements for a total of 12 KW power
- Electric thermostat adjustable from 150°-500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135º for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 26½" D x 24" H
- Unique stackable design
- One year limited warranty, parts and labor

en - Bakery Depth				
Voltage:				
☐ 208 - 1 Phase ☐ 208 - 3 Phase				
☐ 240 - 1 Phase ☐ 240 - 3 Phase				
Options and Accessories				
☐ Stainless steel bottom shelf (RECOD-1 Only				
☐ Stacking kit to stack two single deck units (includes 6" legs)				
5" swivel casters (set of four - 2 locking)				
☐ Extra oven racks (Qty:)				
Glass view door for left side (right is standard)				
☐ Pan rack (RECOD-1 Only)				
□ 480 Voltage - 3 Phase				

■ Moisture injection





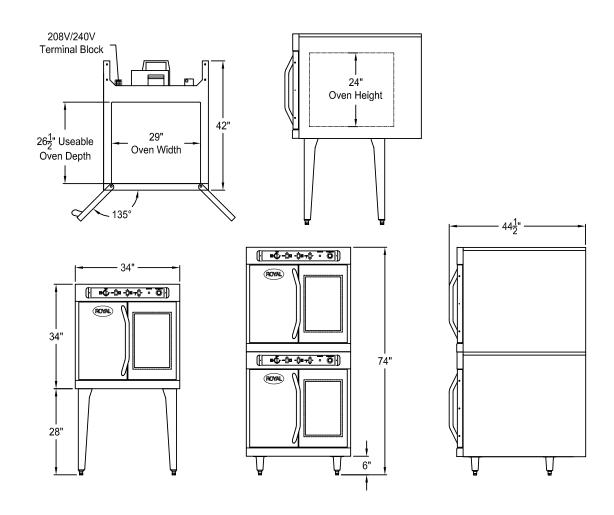

Model Number	Total KW	Ship Weight
RECOD-1	12	535 lbs.
RECOD-2	24	1,020 lbs.

Electrical: Two speed motor (1725/1140 rpm) 230 V, 50/60 Hz, ½ HP Terminal block for power cord connection with ground lug.

Heating Elements:

Voltage (V)	Phase	Total KW	Current (Amps)
208	1	12	60
208	3	12	L1-35, L2-34, L3-34
240	1	12	50
240	3	12	L1-30, L2-29, L3-29
480	3	12	L1-16, L2-15, L3-15

Clearances:

	Combustible	Non-Combustible
Rear	0"	0"
Sides	0"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.