



VACUUM PACKING MACHINE SU-316GP+ 120/50-60/1

Tabletop model. 670 cf/h. 12.6".



P/N. 1140758



OPTIONS

- | | |
|---|--|
| ☐ Printer | ☐ Bag cutting kit |
| ☐ Vacuum packing pouches | ☐ Support for liquids |
| ☐ Vac-Norm external vacuum kit, containers and accessories | ☐ Additional filling plates |

ACCESSORIES

- | | |
|---|--|
| ☐ Filling plates | machines |
| ☐ Liquid insert plates | ☐ Thermal labels for CG2 / RB printer |
| ☐ Vac-norm external vacuum kit | ☐ RB desktop printer for SU vacuum packing machines |
| ☐ Vac-norm containers | ☐ Thermal transfer labels for RB printer |
| ☐ Smooth bags for vacuum packing | |
| ☐ Trolley for vacuum packing | |

SPECIFICATIONS

Pump capacity: 670 cf/h

Bar length: 12.6"

Vacuum pressure (maximum): 2 mbar

Electrical supply: 120 V / 60 Hz / 1~ (8 A)

Plug: USA (NEMA 5-15P / 2P+G)

Internal dimensions

- ✓ Width: 13"
- ✓ Depth: 14.2"
- ✓ Height: 6.1"

External dimensions (W x D x H)

- ✓ Width: 15"
- ✓ Depth: 18.3"
- ✓ Height: 16"

Net weight: 94 lb

Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

Crated dimensions

18.1 x 20.9 x 18.1 "

Gross weight: 108.7 lbs.

SALES DESCRIPTION

12.6" sealing bar.
670 cf/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- | | |
|----------------------------------|-------------------------|
| ✓ Filling plate | ✓ Printer connection |
| ✓ Inert gas flush (2 injectors). | ✓ "Plus" sealing system |
| ✓ Bluetooth connectivity | |








VACUUM PACKING MACHINE SU-316GP+ 120/50-60/1

Tabletop model. 670 cf/h. 12.6".



P/N. 1140758

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

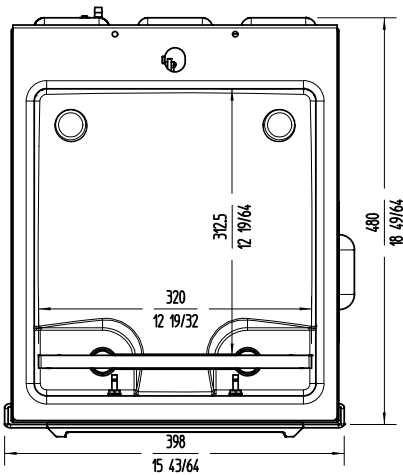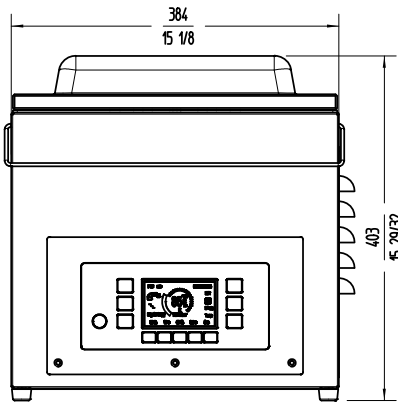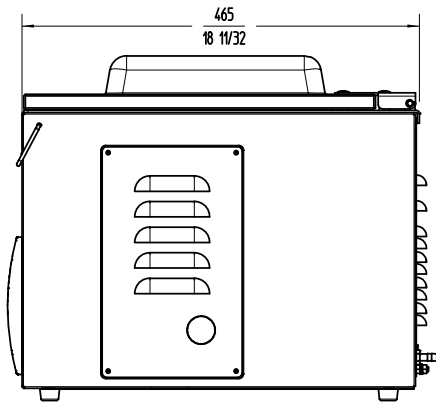

sammic | www.sammic.us
Food Service Equipment Manufacturer

usa@sammic.com phone +1 (224) 307-2232
1225 Hartrey Avenue toll free +1 844 275 3848
60202-1056 Evanston, IL



Project	Date
Item	Qty
Approved	

product sheet
updated 10/28/24