



HEATED TANK 120P 208-240/50-60/1 · 120 L / 30 GAL



P/N. 1180422



SALES DESCRIPTION

Connected to and controlled by SmartVide XL.

Connected to and controlled by SmartVide XL to reach the set temperature faster.

- ✓ Connected to and controlled by SmartVide XL immersion circulator.
- ✓ Intelligent interaction allows for optimization of heating times.
- ✓ This is specially useful to cook very cold or frozen products.
- ✓ Stainless steel made.
- ✓ Complete with filling tap and drain key.
- ✓ NSF-listed in combination with the immersion circulator SmartVide XL.
- ✓ Evaluated as an electrical accessory for SmartVide XL (ETL listed).

* Please note: SmartVide immersion circulator must be ordered separately.

SPECIFICATIONS

Capacity: 30 gal

Electrical supply: 208-240 V / 50-60 Hz / 1~

Plug: USA (NEMA 6-20P / 2P)

Total loading: 4 Hp / 3000 W (240V)

Total loading together with SmartVide XL:

Phase (# of Wire): Single Phase (2 wire + ground)

- ✓ 208V - 4.4 Kw.
- ✓ 240V - 5.8 Kw.

External dimensions (W x D x H)

External dimensions (W x D x H): 29.1" x 22.9" x 33.5-35.4"

Crated dimensions

33.5 x 29.9 x 37.4 "

Gross weight: 120.4 lbs.






HEATED TANK 120P 208-240/50-60/1 · 120 L / 30 GAL



P/N. 1180422

FOOD PRESERVATION AND SOUS-VIDE
SMARTVIDE SOUS-VIDE COOKERS

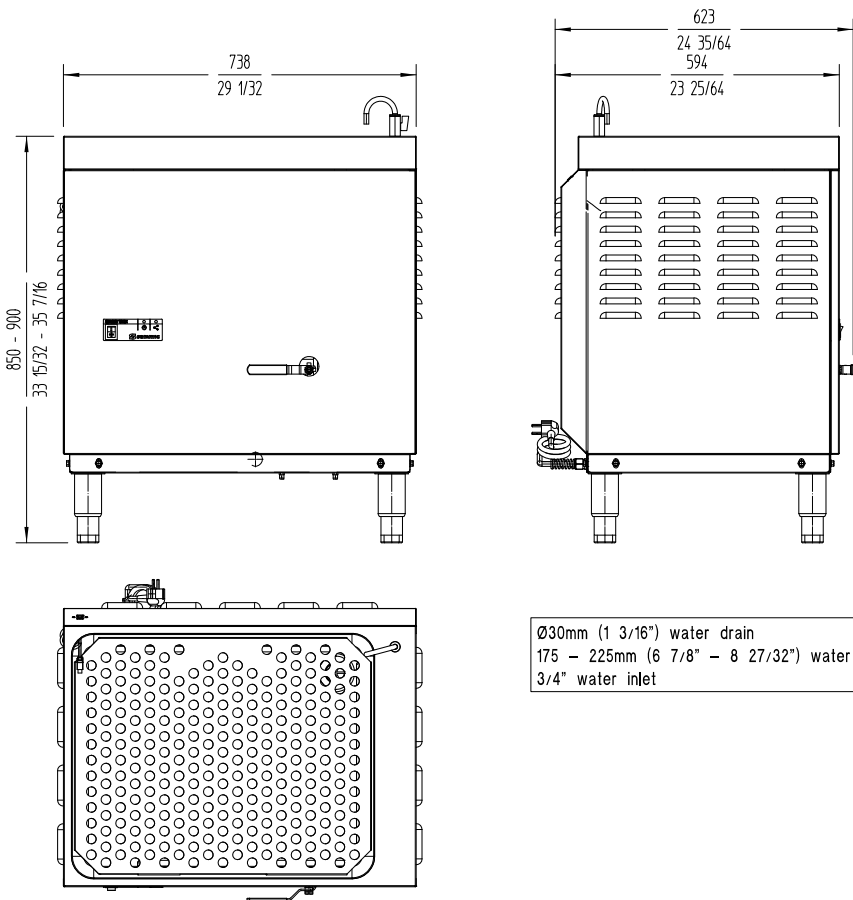

**sammic** | sammic.us
Food Service Equipment Manufacturer
usa@sammic.com phone +1 (224) 307-2232
1225 Hartrey Avenue toll free +1 844 275 3848
60202-1056 Evanston, IL



Project	Date
Item	Qty
Approved	

product sheet
updated 04/10/25