



# COUNTERLINE - CATERING/OUTDOOR GRIDDLE

Heavy Duty, Thermostatic and Manual, Gas

### Standard Features

- Available in 18" and 24" widths
- 30,000 BTU (NAT or LP) burner per 12" Thermostatic Models
- Electronic spark ignition (battery)
- 316L stainless steel front, rear, sides, and bottom panels
- Reinforced, insulated double wall sides
- 1" thick polished rolled steel plate
- 5" high 316L stainless steel rear and side splash guards
- 3/4" rear gas connection and pressure regulator
- Protected flue opening
- Exclusive "NO COLD" Zone - Uniform heat distribution across surface
- Each burner equipped with runner tube
- Grease drawers with large capacity
- Fully welded griddle plate with protected exhaust vent

### Standard Features of Thermostatic Griddle Models

- "Insta-on" thermostatic controls for precise settings between 200°F and 400°F
- Imbedded load sensing thermostat
- Flame failure safety device

Thermostatic Griddles:  
HDG-18-316L, HDG-24-316L



(Model HDG-24-316L)

Job  
#

### STANDARD CONSTRUCTION SPECIFICATIONS

**Exterior Finish:** Front, rear, sides and bottom panels are constructed of 316L stainless steel. Sides are reinforced and fully insulated. 5" rear and side splash.

**Griddle Plate:** 18" and 24" wide unit with one 30,000 BTU Fully welded, 1" thick polished steel griddle plate with side splash guards, and grease drawer.


**Griddle Controls:** Independent, "Insta-on" thermostatic controls with uniform temperature range of 200°F to 400°F.

**Legs:** Stainless steel 4" adjustable legs.

**Gas Heat Control System:** Each griddle is heated by a "U" shaped burner. Each burner is controlled by a thermostatic control. For safety, each pilot has a flame failure device. A 3/4" rear gas connection is standard.





Models:  HDG-18-316L  HDG-24-316L

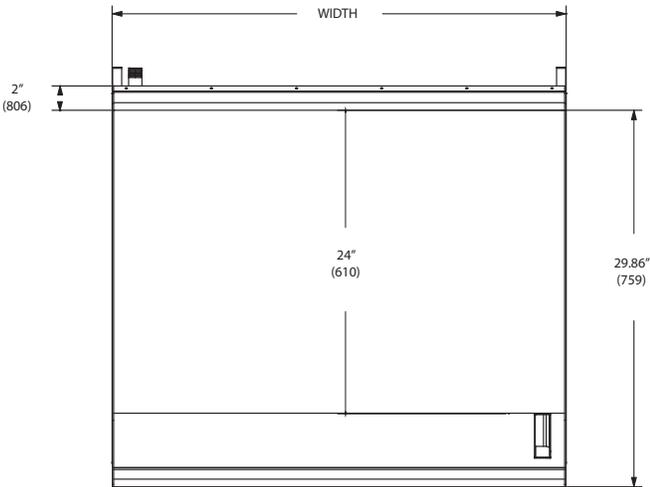

SHIPPING CRATE DIMENSIONS & WEIGHT					
MODEL	WIDTH	NUMBER OF BURNERS	CRATED WIDTH	CRATED DEPTH	CRATED WEIGHT
HDG-18-316L	18" (457)	1	31" (788)	39" (991)	270 lbs (122 kg)
HDG-24-316L	24" (610)	2	31" (788)	39" (991)	305 lbs (159 kg)

(Model shown with thermostatic controls)

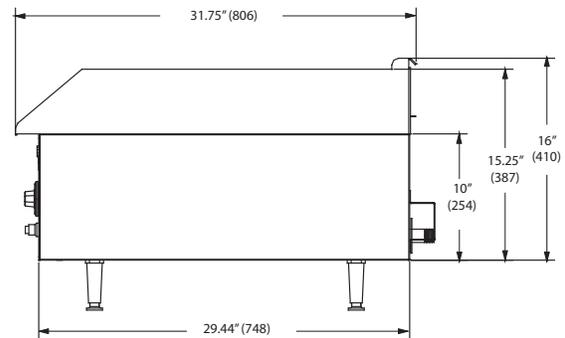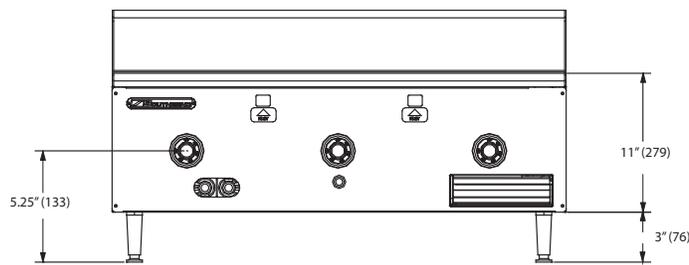

### UTILITY INFORMATION

**GAS:** Each unit has a 3/4" rear gas connection with a male NPT connector (female when regulator is added). Minimum supply pressure is 7" W.C. for natural gas and 11" W.C. for propane. All units require a regulated gas supply. pressure regulator included. If using a flexible hose gas connection, the I.D. of the hose must not be smaller than the connector on the unit and must comply with ANSI Z21.69, providing an adequate means of restraint to prevent undue strain on the gas connection.

MODEL	GAS (BTU/HR)	
	NATURAL	PROPANE
HDG-18-316L	30,000	30,000
	20,000	20,000
HDG-24-316L	60,000	60,000
	40,000	40,000

### MISCELLANEOUS

- If casters are used with flex hose, a restraining device should be used to eliminate undue strain on the flex hose.
- Minimum clearance from noncombustible construction is zero. Minimum clearance from combustible construction is 12" on sides and 8" on rear.
- Install under vented hood.
- Check local codes for fire and sanitary regulations.

**NOTICE:**

Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

### OPTIONS AND ACCESSORIES

- 316L Stainless steel stand
- All Terrain 10" casters
- Chrome plated griddle plates
- Stainless steel plate shelf with or without cutting board
- Grooved griddle plates
- 2" high insulator base for mounting on refrigerated base

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**



1100 Old Honeycutt Road, Fuquay-Varina, NC 27526  
(919) 762-1000 www.southbendnc.com