

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H :		
Approval :		

Pass Thru Glass Door Heated Cabinet

Pass-Thru PRO Series

Model: PRO-77H-G-PT

___ FEATURES & BENEFITS =_

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length glass doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles











PRO-77H-G-PT	Door	78.1	Snelves	(W) 3000	15	Weight (lbs.) 767	(inches) 773/4 x 361/4 x 78
Model	Swing	CU./FT.	#of Shelves	Wattage	AMPS	Crated	$L \times D^{\dagger} \times H^{\dagger}$

(unit: inch)

Model: PRO-77H-G-PT

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type	③ NEMA L14-20P				
Full Load Amperes	15				
Wattage(W)	3000				
Feed Wires with Ground	4				
Cord Length (ft.)	8				
DIMENSIONAL DATA					
# of Doors	6				
# of Racks Accepted	3				
Net Capacity (cu. ft.)	78.1				
Ext. Length Overall (in.)	773/4 (1976mm)				
Ext. Depth Overall (in.)*	361/4 (920mm)				
Ext. Height Overall (in.)†	78 (1982mm)				
Int. Length Overall (in.)	681/4 (1735mm)				
Int. Depth Overall (in.)	275/8 (702mm)				
Int. Height Overall (in.)	58 _{3/4} (1493mm)				
# of Shelves	9				
Shelf Size (L x D) (in.)	231/2 x 263/8 (Left/Right)				
Sileli Size (L X D) (III.)	25 x 263/8 (Middle)				
Net Weight (lbs.)	699				
Gross Weight (lbs.)	767				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/2" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY: 3 Year Parts and Labor Warranty


STANDARD FEATURES


- · Door locks standard
- · Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design
- ** Lead time applies. Please contact your sales representative for more details to order.

OPTIONAL ACCESSORIES

- 5" caster. 1/2" diameter & 13 TPI:
- M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- · Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans-sold separately)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal), TS3-N1C(#1), TS3-N4C(#4), TS3-UNC-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

PLAN VIEW

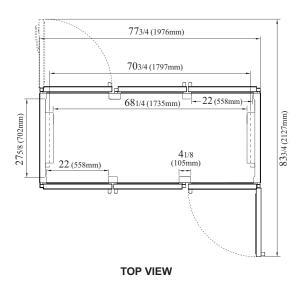

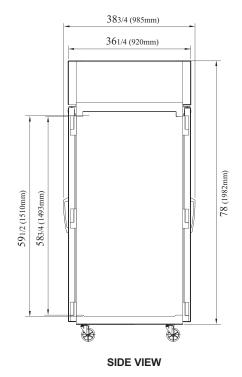

Ver.20200421









Turbo air











■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519 ■ Warranty: 800-381-7770 ■ AC: 888-900-1002