



VALYR™

BY STRATA GPO

Project Name: _____

Location: _____

Item #: _____

Qty: _____

VALYR 36" Standard Series Gas Charbroiler

VALECTC-36NG




With the VALYR Standard Series Gas Charbroiler, grill up burgers, steak, chicken, seafood and more. This compact 36-inch charbroiler gives food distinct char marks and a smoky flavor. It is constructed with a stainless steel front and sides that are fully welded and can withstand the toughest of kitchen environments. The commercial charbroiler grill has three manual stainless steel 30,000 BTU burners with one cast iron burner for every 12" of grate width. Heavy gauge stainless steel radiants provide even heat distribution.

FEATURES AND CONSTRUCTION

- The perfect choice for grilling burgers, hot dogs, chicken, vegetables, sandwiches and more
- Compact 36" countertop design is space efficient
- Constructed of stainless steel front and sides that are fully welded and are able to withstand the toughest of kitchen environments
- 3 manual stainless steel 30,000 BTU burners with one cast iron burner for every 12" of grate width
- Heavy gauge stainless steel radiants provide even heat distribution
- 3" front and side backsplashes protect against splatter and spills
- (4) 5" adjustable legs provide stability
- Separate gas valves for each burner with standing pilot lights
- 3/4" rear NPT gas inlet
- Set up for use with Natural Gas (NG) and is field convertible to Liquid Propane (LPG)

3RD PARTY APPROVALS

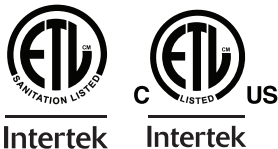

WARRANTY (USA / CANADA)

1 Year Limited Warranty



INCLUDED COMPONENTS

- Charbroiler, Radiant, Regulator, Instruction Manual, Conversion Kit, Drip Tray







VALYR™
BY STRATA GPO

VALYR 36" Standard Series Gas Charbroiler

VALECTC-36NG

FRONT

SIDE

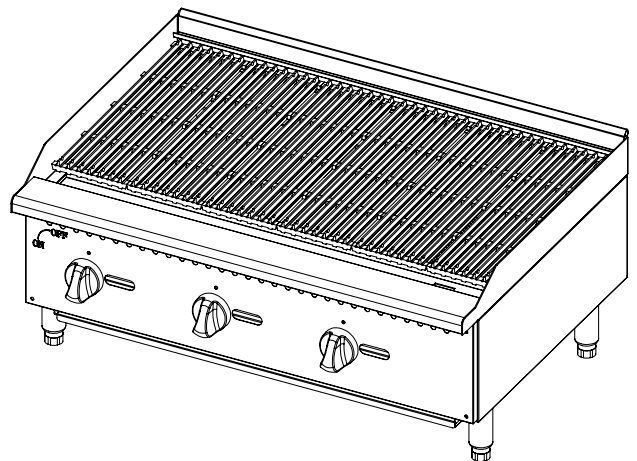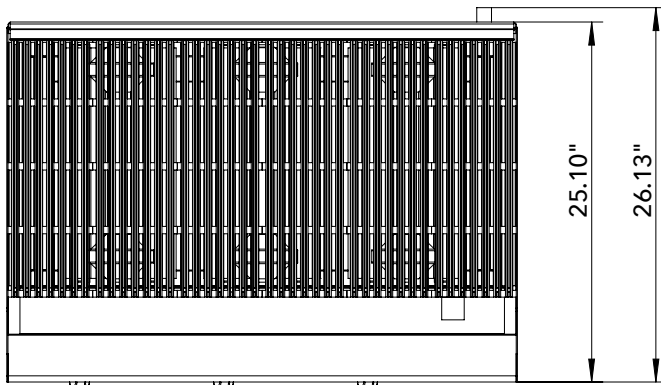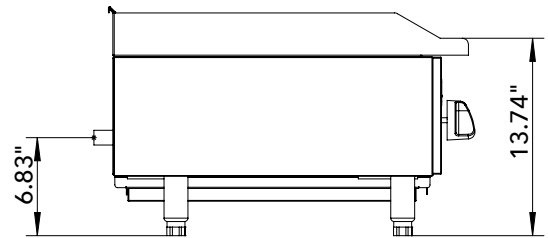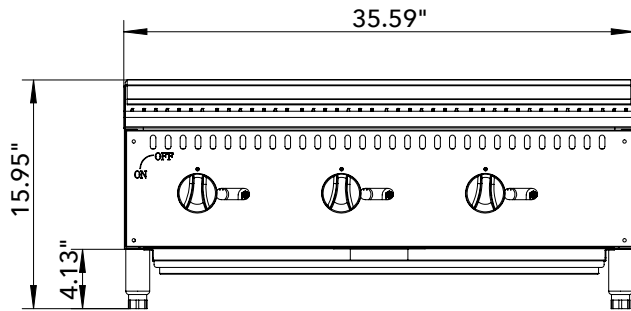

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions	Item Weight lbs	Shipping Weight lbs
Manual	90000	3	Cast Iron	1	36" x 26" x 15.75"	143.3	189.2

ADDITIONAL INFORMATION

- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa. Electricity not needed.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

03.14.25