Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

CORE SERIES SX36 RANGE

36" Range with 6 Open Burners



Model SX36-6BN

SPECIFIER STATEMENT

Core Series 36" wide light-duty range, Vulcan Model No. SX36-6BN. Stainless steel front, sides, backriser, high shelf and bullnose. High temperature burner T knobs with set screw. Porcelain door liner and oven bottom. Six 28,000 BTU/hr. cast top burners with lift-off burner heads. Shrouded flash tube pilot system (one pilot per two burners). 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 30,000 BTU/hr. Standard oven measures 26¾" W x 26" D x 13¾" H. Thermostat adjusts from 250° to 500°F. One oven rack with four rack positions. ¾" rear gas connection and gas pressure regulator. Total input: 198,000 BTH/hr.

Exterior Dimensions:

36"W x 33¼"D x 60⅜"H on 6" adjustable legs.

MODELS

- ❑ **SX36-6BN** 1 Standard Oven / Natural Gas
- ❑ **SX36-6BP** 1 Standard Oven / Propane

STANDARD FEATURES

- Stainless steel front, sides, backriser, lift-off high shelf.
- 6" Stainless steel adjustable legs.
- 28,000 BTU/hr open top burners with lift-off heads.
- Shrouded flash tube pilot system (one pilot per two burners).
- 12" x 12" cast top grates with aeration bowls.
- 30,000 BTU/hr standard oven cavity measures 26¾"w x 26"d x 13¾"h.
- Oven thermostat adjusts from 250° to 500°F.
- One oven rack and four rack positions.
- ¾" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

ACCESSORIES *(packaged & sold separately)*


- ❑ Extra oven rack.
- ❑ Reinforced backriser and high shelf for mounting salamander broiler.
- ❑ Set of four casters (two locking).


CORE SERIES - SX36 - 36" RANGE WITH 6 OPEN BURNERS

Approved by_____ Date_____ Approved by_____ Date_____

CORE SERIES - SX36 RANGE

36" Range with 6 Open Burners

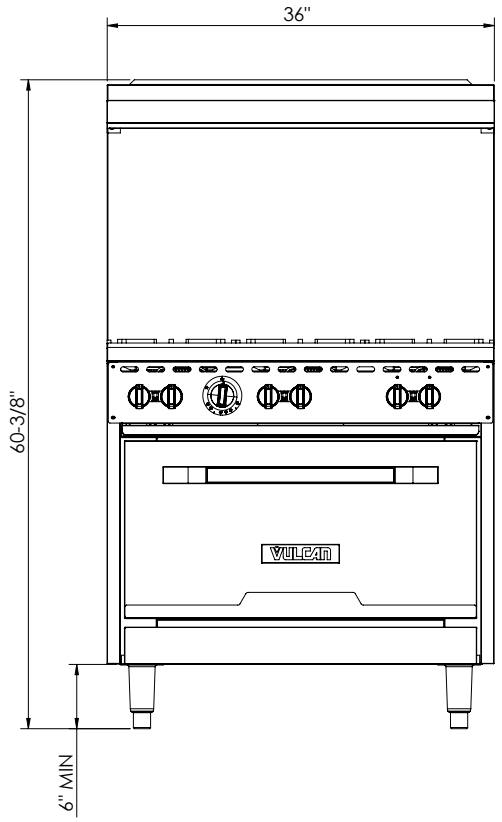

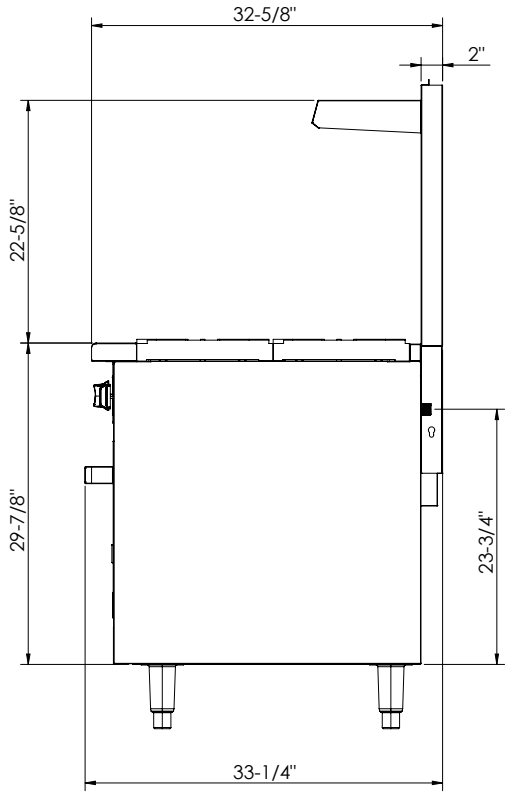

Gas Pressure


Natural Gas: 5.0" (127mm) W.C.
Propane Gas: 10.0" (254 mm) W.C.

A gas pressure regulator supplied with the unit must be installed.

Gas line connecting to appliance must be 3/4" diameter or larger. If flexible connectors are used, the inside diameter must be the same as the 3/4" iron pipe.

Clearances	Combustible	Non-Combustible
Rear	12"	6"
Right Side	10"	0"
Left Side	10"	0"

Specify type of gas when ordering.
Specify altitude when above 2,000 feet.

Top Configuration	Model	Description	Total Input BTU / Hr.	Unit Dimensions (W x D x H)	Shipping Dimensions (W x D x H)	Shipping Weight Lbs. / Kg
	**SX36-6BN**	1 Standard Oven 6 Burners / Natural Gas	198,000	36" W x 33¼" D x 60⅜" H	41" W x 41" D x 35" H	470 lbs / 213 kg
	SX36-6BP	1 Standard Oven 6 Burners / Propane	198,000	36" W x 33¼" D x 60⅜" H	41" W x 41" D x 35" H	470 lbs / 213 kg

This appliance is manufactured for commercial use only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.