BUILT-IN/DROP-IN WARMERS



- MODULAR DRY WELL WARMER
- SINGLE PAN TOP-MOUNT MODULAR WARMER
- TWO PAN TOP-MOUNT MODULAR WARMER
- THREE PAN TOP-MOUNT MODULAR WARMER
- FOUR PAN TOP-MOUNT MODULAR WARMER
- FIVE PAN TOP-MOUNT MODULAR WARMER
- ROUND WARMERS TOP-MOUNT
- ROUND WARMERS FULLY INSULATED w/ AUTO FILL
- RECTANGULAR WARMERS SINGLE-PAN TOP-MOUNT
- RECTANGULAR WARMERS SINGLE-PAN BOTTOM-MOUNT with SQUARE CORNERS
- RECTANGULAR WARMERS SINGLE-PAN BOTTOM-MOUNT with ROUND CORNERS
- HALF-SIZE PAN TOP-MOUNT
- BAIN MARIE STYLE WARMERS
- SLOPE-TOP ADAPTERS
- BUILT-IN/DROP-IN WARMER ACCESSORIES

WELLS

MODULAR DRY WELL WARMER

MODULAR DRY WELL

- Saves precious water resources
- Eliminates the costly labor needed to fill and maintain wet wells
- Eliminates the risk of expensive leaks and damage from poor water quality that occur with traditional wet wells

PATENT PENDING



Constructed in the U.S.A. with a corrosion-resistant type 430 stainless steel body
Units include factory-attached infinite controls for each individual well

Same sizes as Wells MOD Series for easy replacement. One model for all pan depths

Dry Well Modular Warmers

Model No.	# of Dry Wells	Description	Size Width (top width) x Depth x Height (below surface) [in]	Ship Wt [lb]	
	Modular Dry Well Warmers				
MDW100	SINGLE WELL	Infinite Control (1 control) 208/240V, 1Ø, 610/800W	14-4/5 x 20 x 11- 9/10	34	
MDW200	TWO WELLS	Infinite Control (2 controls) 208/240V, 1Ø, 1220/1600W	29-1/2 x 20 x 11- 9/10	63	
MDW300	THREE WELLS	Infinite Control (3 controls) 208/240V, 3Ø, 1830/2400W	43-1/2 x 20 x 11- 9/10	160	
MDW400	FOUR WELLS	Infinite Control (4 controls) 208/240V, 3Ø, 2440/3200W	57-1/2 x 20 x 11- 9/10	185	
MDW500	FIVE WELLS	Infinite Control (5 controls) 208/240V, 3Ø, 3050/4000W	71-1/2 x 20 x 11-9/10	210	

MODULAR DRY WELL WARMER

GO DRY

hold warm food without water

WHY GO DRY?

Save 500 gallons water / year per model
Save $500 / year in labor costs per model
Save $2,000 in system installation costs
Save up to 50% in energy costs!

SAVE ON INSTALLATION & OPERATIONAL COSTS

- NO messy water or steam
- NO plumbing required
- NO sanitation issues
- NO corrosion
- NO water piped to unit
- NO fill faucet
- NO drains or plumbing
- NO floor sink

MDW300



Single-Pan Top-Mount Modular Warmer

The original modular warmers from Wells feature all stainless steel deep-drawn construction for maximum strength and durability. Fully insulated construction saves energy while maintaining precise temperatures





Single-Pan Top-Mount Modular Warmers

Model No.	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
	SINGLE PAN 12" x 20", TOP MOUNT				
MOD100-120 **MOD100-208/240**	Infinite Control 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-3/4 x 21-3/4	24	4.15	
MOD100D-120 **MOD100D-208/240**	Infinite Control, with Drain 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-3/4 x 21-3/4	24	4.15	
MOD100T-120 **MOD100T**	Thermostat control 120V, 1Ø, 1650W 208/240V, 1Ø, 1240/1650W	13-3/4 x 21-3/4	24	4.15	
MOD100TD-120	Thermostat control, with Drain 120V, 1Ø, 1650W	13-3/4 x 21-3/4	24	4.15	
MOD100TD-208/240	Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W	13-3/4 x 21-3/4	24	4.15	
MOD100TD-230	Thermostat control, with Drain 220-240V, 1Ø, 1650W	13-3/4 x 21-3/4	24	4.15	
MOD100TDAF	Autofill, Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W each	14-3/4 x 23-1/2	30	4.15	
	6-ft Cord & Plug for Thermostatic Control Models Only (MOD100s in 120V, 208/240V)				
	SINGLE PAN 12" x 27", TOP MOUNT				
MOD127T	Thermostat control 208/240V, 1Ø, 1240/1650W each	14-3/4 x 30-1/2	25	5.2	
MOD127TD	Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W each	14-3/4 x 30-1/2	25	5.2	
MOD127TDAF	Autofill, Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W each	14-3/4 x 30-1/2	30	5.2	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- AUTOFILL MODELS REQUIRE A WATER CONNECTION. FOR DETAILS REFER TO THE MANUAL & INSTALLATION INSTRUCTIONS
- SLOPE-TOP ADAPTERS (pg 40) • DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Two-Pan Top-Mount Modular Warmer

- **Wellslok™ standard**
- **With or without drains & manifolds**
- **Slim line & extra deep for (4) each 1/3-sized pans per well**



MOD200TM

Two-Pan Top-Mount Modular Warmers

Model No.	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
c UL us	**TWO PAN 12" x 20"**, TOP MOUNT				
MOD200	Infinite control 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	
MOD200D	Infinite control, with Drain 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	
MOD200DM	Infinite control, with Drain Manifold 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	
MOD200T	Thermostat control 208/240V, 1Ø, 1240/1650W each	29-1/2 x 23-5/8	51	7.89	
MOD200TD	Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W each	29-1/2 x 23-5/8	53	7.89	
MOD200TDM	Thermostat control, with Drain Manifold 208/240V, 1Ø, 1240/1650W	29-1/2 x 23-5/8	51	7.89	
MOD200TDMAF	Autofill, Thermostat control with Drain Manifold, 208/240V, 3Ø (1Ø), 1240/1650W each	29-1/2 x 23-5/8	65	7.89	
MOD200TDAF	Autofill, Thermostat control with Drain 208/240V, 3Ø (1Ø), 1240/1650W each	29-1/2 x 23-5/8	65	7.89	
c UL us	**TWO PAN 12" x 27"**, TOP MOUNT				
MOD227TDM	Thermostat control, with Drain Manifold 208/240V, 1Ø , 1240/1650W each	29-1/2 x 30-9/16	65	10.15	
MOD227TDMAF	Autofill, Thermostat control, with Drain Manifold, 208/240V, 3Ø (1Ø), 1240/1650W each	29-1/2 x 30-9/16	65	10.15	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- AUTOFILL MODELS REQUIRE A WATER CONNECTION. FOR DETAILS REFER TO THE MANUAL & INSTALLATION INSTRUCTIONS
- SLOPE-TOP ADAPTERS (pg 40) • DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED



Three-Pan Top-Mount Modular Warmer

MOD300



Three-Pan Top-Mount Modular Warmers

Model No.	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
	THREE PAN 12" x 20", TOP MOUNT				
MOD300	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	73	10.54	
MOD300D	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	74	10.54	
MOD300DM	Infinite control, with Drain Manifold 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	78	10.54	
MOD300T	Thermostat control 208/240V, 3Ø (1Ø), 1240/1650W each	43-1/2 x 23-5/8	75	10.54	
MOD300TD	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 1240/1650W each	43-1/2 x 23-5/8	75	10.54	
MOD300TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W	43-1/2 x 23-5/8	78	10.54	
MOD300TDMAF	Autofill, Thermostat control with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	43-1/2 x 23-5/8	90	10.54	
MOD300TDAF	Autofill, Thermostat control with Drain, 208/240V, 3Ø, 1240/1650W each	43-1/2 x 23-5/8	90	10.54	
	THREE PAN 12" x 27", TOP MOUNT				
MOD327T	Thermostat control 208/240V, 3Ø, 1240/1650W each	43-1/2 x 30-9/16	90	12.45	
MOD327TD	Thermostat control, with Drain 208/240V, 3Ø, 1240/1650W each	43-1/2 x 30-9/16	90	12.45	
MOD327TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	43-1/2 x 30-9/16	90	12.45	
MOD327TDMAF	Autofill, Thermostat control, with Drain Manifold, 208/240V, 3Ø (1Ø), 1240/1650W each	43-1/2 x 30-9/16	90	12.45	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- AUTOFILL MODELS REQUIRE A WATER CONNECTION. FOR DETAILS REFER TO THE MANUAL & INSTALLATION INSTRUCTIONS
- SLOPE-TOP ADAPTERS (pg 40)
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Four-Pan Top-Mount Modular Warmer

MOD427TDM



Four-Pan Top-Mount Modular Warmers

Model No.	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
	FOUR PAN 12" x 20", TOP MOUNT				
MOD400	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	95	13.56	
MOD400D	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	95	13.56	
MOD400DM	Infinite control, with Drain Manifold 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	98	13.56	
MOD400T	Thermostat control 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 23-5/8	98	13.56	
MOD400TD	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 23-5/8	105	13.56	
MOD400TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W	57-1/2 x 23-5/8	105	13.56	
MOD400TDAF	Autofill, Thermostat control with Drain, 208/240V, 3Ø, 1240/1650W each	57-1/2 x 23-5/8	112	13.56	
MOD400TDMAF	Autofill, Thermostat control with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 23-5/8	112	13.56	
MOD400TDMAFS	Autofill, Single control panel, Thermostat control with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 23-5/8	112	13.56	
	FOUR PAN 12" x 27", TOP MOUNT				
MOD427TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 30-9/16	112	15.85	
MOD427TDMAF	Autofill, Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 30-9/16	112	19.15	
MOD427TDMAF1	Autofill, Single control panel, Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	57-1/2 x 30-9/16	124	19.15	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- AUTOFILL MODELS REQUIRE A WATER CONNECTION. FOR DETAILS REFER TO THE MANUAL & INSTALLATION INSTRUCTIONS
- SLOPE-TOP ADAPTERS (pg 40)
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED
- ALL MOD400'S SHIP 3Ø AND ARE FIELD CONVERTIBLE TO 1Ø

MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

Five-Pan Top-Mount Modular Warmer


MOD500

Five-Pan Top-Mount Modular Warmers

Model No.	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
	FIVE PAN 12" x 20", TOP MOUNT				
MOD500	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	105	16.57	
MOD500D	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	116	16.57	
MOD500DM	Infinite control, with Drain Manifold 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	118	16.57	
MOD500T	Thermostat control 208/240V, 3Ø (1Ø), 1240/1650W each	71-1/2 x 23-5/8	116	16.57	
MOD500TD	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 1240/1650W each	71 1/2 x 23 5/8	116	16.57	
MOD500TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W	71-1/2 x 23-5/8	122	16.57	
MOD500TDMAF	Autofill, Thermostat control with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	71-1/2 x 23-5/8	136	16.57	
MOD500TDMAFS	Autofill, Single control panel, Thermostat control with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	71-1/2 x 23-5/8	126	16.57	
	FIVE PAN 12" x 27", TOP MOUNT				
MOD527TDM	Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	71-1/2 x 30-9/16	136	19.15	
MOD527TDMAF	Autofill, Thermostat control, with Drain Manifold 208/240V, 3Ø (1Ø), 1240/1650W each	71-1/2 x 30-9/16	232	37.3	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- AUTOFILL MODELS REQUIRE A WATER CONNECTION. FOR DETAILS REFER TO THE MANUAL & INSTALLATION INSTRUCTIONS
- SLOPE-TOP ADAPTERS (pg 40)
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED
- ALL MOD500'S SHIP 3Ø AND ARE FIELD CONVERTIBLE TO 1Ø

MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

FULLY INSULATED ROUND WARMERS



SAVE GREEN!

MADE IN THE USA

Round warmer models listed on pages 27-30

Choose between models that are fully insulated around the sides and bottom or standard non-insulated models

FULLY INSULATED MODELS SAVE ENERGY & MAY BE INSTALLED IN NON-METAL COUNTERS

ENERGY SAVINGS

Up to **45% energy savings** vs. non-insulated warmers

7% energy savings vs. competitive insulated warmers

FASTER PRE-HEATING

Heats up in **less than half the time** of insulated warmers

QUICKER RECOVERY

53% less energy required to bring up to temperature vs. non-insulated warmers

22% less energy required to bring up to temp. vs. competitive insulated warmers

LONGER CRITICAL PART LIFE

95% less on/off cycling vs. competitive insulated warmers

LESS HEAT UNDER THE COUNTER

WELLS

FULLY INSULATED ROUND WARMERS

Round drop-in warmers are available in 4-quart, 8-quart, or 11-quart models with or without drains.

Choose between infinite or thermostatic controls. Cook & hold models for wet operation only



c RU us LISTED MODELS WITH INFINITE CONTROLS USE THESE CONTROLS



c RU us LISTED MODELS WITH THERMOSTATIC CONTROLS USE THESE CONTROLS
(CONDUIT AND ENCLOSED BOX NOT SUPPLIED)



c UL us LISTED MODELS WITH THERMOSTATIC CONTROLS USE THESE CONTROLS



MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

Round Warmers Top-Mount, 4-Quart







Round Warmers, Top-Mount, 4-Quart

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	NON-INSULATED, 4-QUART ROUND WARMERS, TOP MOUNT					
	SS4D 120	4 Quart, Infinite control with DRAIN 120V, 1Ø, 450W	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
	SS4TU 120	4 Quart, Thermostat control 120V, 1Ø, 620/825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
	SS4TDU	4 Quart, Thermostat control with DRAIN 208/240V, 1Ø, 825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
	SS4TDU 120	4 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
	SS4TUC	4 Quart, Thermostat control, with CORD and PLUG 208/240V, 1Ø, 620/825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
	INSULATED, 4-QUART ROUND WARMERS, TOP MOUNT					
	SS4TUCI 120	4 Quart, Thermostat control with CORD and PLUG, INSULATED 120V, 1Ø, 825W, UL APPROVED	8-1/4" O.D.	9.6 lb. 4.4 kg	0.82	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Round Warmers Top-Mount, 7-Quart

Round Warmers, Top-Mount, 7-Quart

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	NON-INSULATED, 7-QUART ROUND WARMERS, TOP MOUNT					
	SS8D	7 Quart, Infinite control with DRAIN 208/240V, 1Ø, 338/450W	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TD 120	7 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TD	7 Quart, Thermostat control with DRAIN 208/240V, 1Ø, 620/825W	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TU 120	7 Quart, Thermostat control 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TU	7 Quart, Thermostat control 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TDU 120	7 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	SS8TDU	7 Quart, Thermostat control with DRAIN 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
	INSULATED, 7-QUART ROUND WARMERS, TOP MOUNT					
	SS8TUI	7 Quart, Thermostat control INSULATED 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
	SS8TDUI 120	7 Quart, Thermostat control with DRAIN, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
	SS8TDUI	7 Quart, Thermostat control with DRAIN, INSULATED 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
	SS8TUCI 120	7 Quart, Thermostat control with CORD and PLUG, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
	SS8TDUCI 120	7 Quart, Thermostat control with DRAIN, CORD and PLUG, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Round Warmers Top-Mount, 11-Quart

Round Warmers, Top-Mount, 11-Quart

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	NON-INSULATED, 11-QUART ROUND WARMERS, TOP MOUNT					
	SS10D 120	11 Quart, Infinite control with DRAIN 120V, 1Ø, 450W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10D 208/240	11 Quart, Infinite control with DRAIN 208/240V, 1Ø, 338/450W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10T 120	11 Quart, Thermostat control 120V, 1Ø, 825W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10T 208/240	11 Quart, Thermostat control 208/240V, 1Ø, 620/825W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TD 120	11 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TD 208/240	11 Quart, Thermostat control with DRAIN 208/240V, 1Ø, 620/825W	12" O.D.	7 lb. 3.2 kg	1.62	
CE	**SS10TD 230**	11 Quart, Thermostat control with DRAIN 220-240V, 1Ø, 825W	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TU 120	11 Quart, Thermostat control 120V, 1Ø, 825W, UL APPROVED	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TU 208/240	11 Quart, Thermostat control 208/240V, 1Ø, 620/825W, UL APPROVED	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TDU 120	11 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W, UL APPROVED	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TDU 208/240	11 Quart, Thermostat control with DRAIN 208/240V, 1Ø, 620/825W, UL APPROVED	12" O.D.	7 lb. 3.2 kg	1.62	
	SS10TDUC 120	11 Quart, Thermostat control with DRAIN, CORD and PLUG 120V, 1Ø, 825W,UL APPROVED	12" O.D.	7 lb. 3.2 kg	1.62	
	INSULATED, 11-QUART ROUND WARMERS, TOP MOUNT					
	SS10TUI 120	11 Quart, Thermostat control, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TUI 208/240	11 Quart, Thermostat control, INSULATED 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TDUI 120	11 Quart, Thermostat control with DRAIN, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TDUI 208/240	11 Quart, Thermostat control with DRAIN, INSULATED 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TUCI 120	11 Quart, Thermostat control with CORD and PLUG, INSULATED 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TDUCI 120	11 Quart, Thermostat control with DRAIN, CORD and PLUG, INSULATED 120V, 1Ø, 825W, with cord and plug , UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
	SS10TDUCI 208/240	11 Quart, Thermostat control with DRAIN, CORD and PLUG, INSULATED 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Round Warmers Fully Insulated with Auto Fill

Auto fill option keeps water at proper level



SS8

Round Warmers with Auto-Fill, Top-Mount, Fully Insulated 7 & 11-Quart

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	FULLY INSULATED, 7-QUART ROUND WARMERS with AUTO FILL, TOP MOUNT					
c UL us NSF	**SS8TDUIAF 120**	7 Quart, Thermostat control, FULLY INSULATED with AUTOFILL and DRAIN 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
c UL us NSF	**SS8TDUIAF**	7 Quart, Thermostat control, FULLY INSULATED with AUTOFILL and DRAIN, 208/240V, 1Ø, 620/825W UL APPROVED	10-1/16" O.D.	10.3 lb. (4.7) kg	1.62	
	FULLY INSULATED, 11-QUART ROUND WARMERS with AUTO FILL, TOP MOUNT					
c UL us NSF	**SS10TDUIAF12**	11 Quart, Thermostat control, FULLY INSULATED with AUTOFILL and DRAIN 120V, 1Ø, 828W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
c UL us NSF	**SS10TDUIAF**	11 Quart, Thermostat control, FULLY INSULATED with AUTOFILL and DRAIN 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	
c UL us NSF	**SS10TDUCIAF**	11 Quart, Thermostat control, FULLY INSULATED with AUTOFILL and DRAIN, CORD and PLUG 208/240V, 1Ø, 620/825W, UL APPROVED	10-1/16" O.D.	12.4 lb. (5.6) kg	1.62	

NOTES:


- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED
- AUTOFILL MODELS REQUIRE A WATER SUPPLY CONNECTION. PLEASE REFER TO THE OPERATOR'S MANUAL AND INSTALLATION INSTRUCTIONS FOR DETAILS
- WHEN MANIFOLDING AUTO FILL MODELS WITH NON-AUTO FILL MODELS, USE ALL NEW WARMERS MANUFACTURED STARTING IN 2015

MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

SINGLE WELL RECTANGULAR DROP-IN WARMERS

Drop-in rectangular warmers are designed to keep heated food at safe serving temperatures and are available in a variety of configurations, including partially or fully insulated models

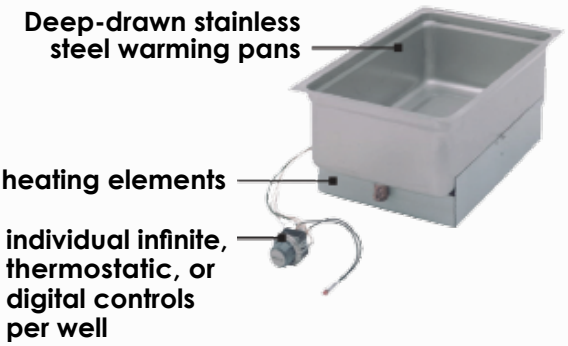

FRACTIONAL-SIZE WARMERS

Fractional sized warmers are ideal for small and/or unusual spaces. These warmers offer all the features and benefits of standard sized drop-in warmers. Pan sizes of 6" x 20" and 10" x 12" with depths of up to 6" accommodate a variety of 1/2-size and fractional-size pans



c RU us LISTED MODELS WITH INFINITE CONTROLS USE THESE CONTROLS



c RU us LISTED MODELS WITH THERMOSTATIC CONTROLS USE THESE CONTROLS
(CONDUIT AND ENCLOSED BOX NOT SUPPLIED)



c UL us LISTED MODELS WITH THERMOSTATIC CONTROLS USE THESE CONTROLS
(ONLY CULUS LISTED MODELS COME WITH CONDUIT AND ENCLOSED CONTROL BOX)



Single-Pan Top-Mount Rectangular Warmers


SS206D


SS276TDU


SS206TDU

Single-Pan Top-Mount Rectangular Warmers

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	SINGLE PAN, 12" x 20" TOP MOUNT					
c UL us	**SS-206 120** **SS-206 208/240**	Infinite Control 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	16	2.97	
c UL us	**SS-206D 120** **SS-206D 208/240**	Infinite Control with DRAIN 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	16	2.97	
c UL us	**SS-206T 120** **SS-206T 208/240**	Thermostat Control 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	16	2.97	
c UL us	**SS-206TU 120** **SS-206TU 208/240**	Thermostat Control 120V, 1Ø, 1650W 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-3/4	20	1.15	
c UL us	**SS-206TD-120** **SS-206TD**	Thermostat Control, with DRAIN 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	15	2.97	
c UL us	**SS-206TDU 120**	Thermostat Control, with DRAIN 120V, 1Ø, 1650W, UL APPROVED	13-11/16 x 21-3/4	21	4.15	
c UL us	**SS-206TDU 208/240**	Thermostat Control, with DRAIN 08/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-3/4	21	4.15	
	SINGLE PAN, 12" x 27" TOP MOUNT					
c UL us	**SS-276TU 120** **SS-276TU 208/240**	Thermostat Control 120V, 1Ø, 1650W 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-1/2 x 28-1/2	22	3.85	
c UL us	**SS-276TDU 120** **SS-276TDU 208/240**	Thermostat Control, with DRAIN 120V, 1Ø, 1650W 208/240V, 1Ø, 1240/1650W, UL APPROVED	13 -1/2 x 28-1/2	22	3.85	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Single-Pan Bottom-Mount Rectangular Warmers

BMW206STDU



Single-Pan Bottom-Mount Rectangular Warmers with Square Corners

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	SINGLE PAN, 12" x 20" BOTTOM MOUNT with SQUARE CORNERS					
c UL us	SS-206ET	Thermostat Control 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	15	2.97	
c UL us	SS-206ETD-120 SS-206ETD	Thermostat Control, with DRAIN 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	15	2.97	
c UL us	SS-206TD6HI	Thermostat Controls, with DRAIN HIGER WATTAGE, 6' Leads standard 208/240V, 1Ø, 1365W	13-11/16 x 21-3/4	15	2.97	
	FULLY-INSULATED, SINGLE PAN, 12" x 20" BOTTOM MOUNT with SQUARE CORNERS					
c UL us	BMW-206ST	Thermostat Control, FULLY INSULATED 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
c UL us	BMW-206STU	Thermostat Control, FULLY INSULATED 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-13/16	24	2.97	
c UL us	BMW-206SDT	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
c UL us	BMW-206STDU6	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-13/16	22	2.97	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED



SS206ET

MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

Single-Pan Bottom-Mount Rectangular Warmers



SS206ERD

Single-Pan Bottom-Mount Rectangular Warmers with Round Corners

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	SINGLE PAN, 12" x 20" BOTTOM MOUNT with ROUND CORNERS					
c UL us	**SS-206ER**	Infinite Control 208/240V, 1Ø, 900/1200W	13-7/8 x 21-15/16	14	2.97	
c UL us	**SS206ERD-120** **SS206ERD**	Infinite Control, with DRAIN 120V, 1Ø, 1200W 208/240V, 1Ø, 900/1200W	13-7/8 x 21-15/16	14	2.97	
	FULLY-INSULATED, SINGLE PAN, 12" x 20" BOTTOM MOUNT with ROUND CORNERS					
c UL us	**BMW206RT-120** **BMW206RT**	Thermostat Control, FULLY INSULATED 120V, 1Ø, 1200W 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
c UL us	**BMW206RTD-120** **BMW206RTD**	Thermostat Control, FULLY INSULATED with DRAIN 120V, 1Ø, 1200W 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
c UL us	**BMW206RTDU**	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-7/8 x 21-15/16	22	2.97	
c UL us	**BMW-206RTD/AFU**	Thermostat Control, FULLY INSULATED with AUTOFILL and DRAIN 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-7/8 x 21-15/16	24	2.97	

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

MODEL KEY

LETTER	OPTION
T	THERMOSTAT CONTROLS
U	UL APPROVED
C	CORD & PLUG
I	INSULATED
D	DRAIN
AF	Auto Fill

Half-Size Single-Pan Top-Mount Warmers



HSW6 & HSW6D

Half-Size/Fractional Single-Pan Top-Mount Rectangular Warmers

Approvals	Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	SINGLE PAN, HALF-SIZE 12" x 10" TOP MOUNT **with WELLSLOCK™**					
c UL us	**HSW-6-120**	Half Size, Holds 12" x 10" pan UL LISTED 120V, 1Ø, 825W, with Wellslok™	11-5/8 x 13-7/8	18	2.16	
c UL us	**HSW-6D-120** **HSW-6D-208/240**	Half Size, Holds 12" x 10" pan with DRAIN, UL LISTED 120V, 1Ø, 450W, with Wellslok™ 208/240V, 1Ø, 620/825W, with Wellslok™	11-5/8 x 13-7/8	18	2.16	

NOTES:


- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED



for more detailed information, visit Wells-Mfg.com

BAIN MARIE WARMERS

Bain Marie warmers are completely self-contained, drop-in design with standard configurations in two to five well models

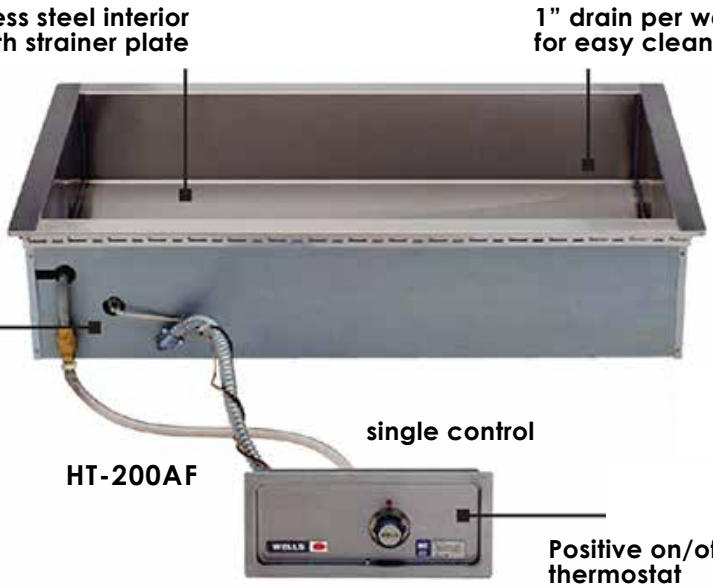

- Holds 12" x 20" & fractional pans
- Auto fill option
- Adapter bars for fractional pans

MADE IN THE USA



WELLS

Bain Marie Style Warmers



HT300

Bain Marie Style Warmers

Model No.	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
	HOLDS 12" x 20" PANS, TOP MOUNT				
HT200	Single Opening 25 3/4" x 19 7/8" Holds (2) 12" x 20" pans 208/240V, 1Ø, 1800/2400W	29-1/2 x 23-5/8	56	7.89	
HT300	Single Opening 39 3/4" x 19 7/8" Holds (3) 12" x 20" pans 208/240V, 1Ø, 2700/3600W	43-1/2 x 23-5/8	63	10.54	
HT400	Single Opening 53 3/4" x 19 7/8" Holds (4) 12" x 20" pans 208/240V, 1Ø (3Ø), 3600/4800W *	57-1/2 x 23-5/8	98	13.56	
HT500	Single Opening 67 3/4" x 19 7/8" Holds (5) 12" x 20" pans 208/240V, 1Ø (3Ø), 4500/6000W *	71-1/2 x 23-5/8	115	16.57	
	LARGE CAPACITY- HOLDS 4/3rd SIZE PANS, TOP MOUNT				
HT227	Single Opening 25 3/4" x 26 7/8" Holds (2) 4/3rd size pans 208/240V, 1Ø, 2480/3300W LARGE CAPACITY	29-1/2 x 30-5/8	59	10.15	
	AUTO-FILL, LARGE CAPACITY- HOLDS 12" x 30" & 4/3rd SIZE PANS, TOP MOUNT				
HT200AF	Single Opening 25 3/4" x 19 7/8" Holds (2) 12" x 20" pans 208/240V, 1Ø, 1800/2400W LARGE CAPACITY with AUTOFILL	29-1/2 x 23-5/8	57	7.89	
HT227AF	Single Opening 25 3/4" x 26 7/8" Holds (2) 4/3rd size pans 208/240V, 1Ø, 2480/3300W LARGE CAPACITY with AUTOFILL	29-1/2 x 30-5/8	65	10.15	
HT300AF	Single Opening 39 3/4" x 19 7/8" Holds (3) 12" x 20" pans 208/240V, 1Ø, 2700/3600W LARGE CAPACITY with AUTOFILL	43-1/2 x 23-5/8	77	10.54	
HT400AF	Single Opening 53 3/4" x 19 7/8" Holds (4) 12" x 20" pans 208/240V, 1Ø (3Ø), 3600/4800W LARGE CAPACITY with AUTOFILL*	57-1/2 x 23-5/8	98	13.56	
HT500AF	Large Capacity, Single Opening 67 3/4" x 19 7/8" Holds (5) 12" x 20" pans 208/240V, 1Ø (3Ø), 4500/6000W LARGE CAPACITY with AUTOFILL*	71-1/2 x 23-5/8	117	16.57	
* select models are field convertible from 3Ø to 1Ø					

NOTES:

- **SPECIFY VOLTAGE, PHASE AND CYCLE ON ALL ORDERS**
- DROP-IN WARMER ACCESSORIES (pg 41)
- EXPORT MODELS CANNOT BE RETURNED

Round & Built-In/Drop-In Warming Accessories

Warming Accessories

Part No.	Description	Ship Wt. [lb]	
ADAPTER TOPS FOR ROUND WARMERS			
20822	Adapter Top, Converts 11 quart models to hold 4 quart inset	2	
ADAPTER TOPS FOR 12" x 20" ROUND CORNER WARMERS			
23138	Adapter Top, Converts warmer to hold one 4 quart and one 11 quart inset	2	
23139	Adapter Top, Converts warmer to hold one 7 quart and one 11 quart inset	2	
23142	Adapter Top, Converts warmer to hold three 4 quart insets	2	
ADAPTER TOPS FOR 12" x 20" SQUARE CORNER WARMERS			
20176	Adapter Top, Converts warmer to hold two 7 quart insets	2	
20434	Adapter Top, Converts warmer to hold two 4 quart and two 2 1/2 quart insets	2	
21615	Adapter Top, Converts warmer to hold three 4 quart insets	2	
21621	Adapter Top, Converts warmer to hold one 7 quart and one 11 quart inset	2	
21624	Adapter Top, Converts warmer to hold four 2 1/2 quart insets	2	
ADAPTER TOPS FOR 12" x 27" SQUARE CORNER WARMER			
22589	Adapter Top, Converts warmer to hold three 7 quart insets	1	
23115	Adapter Top, Converts warmer to hold two 11 quart insets	1	
INSETS WITH LIDS & LADLE			
20774	4 quart Round Inset, Fits 6 1/2" opening	2	
20587	7 quart Round Inset, Fits 8 1/2" opening	3	
20908	11 quart Round Inset, Fits 10 1/2" opening, with handles and slotted lid	4	
21057	11 quart Round Inset, Fits 10 1/2" opening, with hinged lid, NO handles	6	
BUILT-IN WARMER MISCELLANEOUS			
21709	Drain Screen, Fits all models with drains, one per well required	1	
20385	Drain Valve Extension Kit, Extension from drain to counter front with remote handle, for use with "D" models only, excluding "DM" models. Includes 1/2" brass drain valve	1	
22592	Wellslok™ Extension Kit*, For UL listed non-insulated circular warmers only to adapt to wood countertops up to 1 1/2" thick	1	
22593	Wellslok™ Extension Kit*, For UL listed 12" x 20" warmers only to adapt to wood countertops up to 1 1/2" thick	1	
WL0330	Wellslok Extension kit for Fully Insulated Round Warmers only to adapt to wood countertops up to 1 ½" thick	1	
	• Optional 72" Wiring • Thermostatically controlled warmers - one required per well • Infinite Switch controlled models - one required per well • Please contact factory for availability of optional wiring	1	
*Wellslok™ Extension Kits for UL listed units approved for installation in wood countertops. One well unit requires one kit. Two to three well units require two kits. Four to five well units require three kits.			
ADTBAR-HT	Adapter bar for Bain Marie Style Warmers	1	