



WELLS MODEL: HC-100, HC-125, & HC-225 CERAMIC HOTPLATES



HC-125



HC-225

DESCRIPTION

Wells Ceramic Hotplates HC-100, HC-125, and HC-225 are leaders in the hotplate industry because of their efficient and easy-to-use features. Heat-up is five times faster than conventional hotplates providing a clear advantage in commercial food preparation. The completely sealed ceramic surface resists spills and allows for easy cleanup.

WARRANTY

These units come with a one [1] year warranty for parts and labor.

CERTIFICATIONS



FEATURES

- **Heats five times faster** than any conventional hotplate, reducing cooking time and saving energy
- **Smooth, flat surface** works with any pot or skillet and is easy-to-clean.
- **Completely sealed, non-porous surface** resists thermal shock (quick, extreme temperature changes)
- **Long life, fast glowing, radiant element technology** provides even heating of cooking surface that is ideal for display cooking and specialty applications
- **The HC-100, HC-125, and HC-225 Hotplates** are Underwriters Laboratories, Inc. LISTED and meet the National Sanitation Foundation and Canadian standards.

ACCESSORIES/OPTIONS



- **Legs-** set of four, 4" adjustable, plastic- 20314
- **Legs-** set of four, 4" adjustable, metal- 20563





WELLS MODEL: HC-100, HC-125, & HC-225 CERAMIC HOTPLATES

EQUIPMENT DIMENSIONS: INCH [MM]

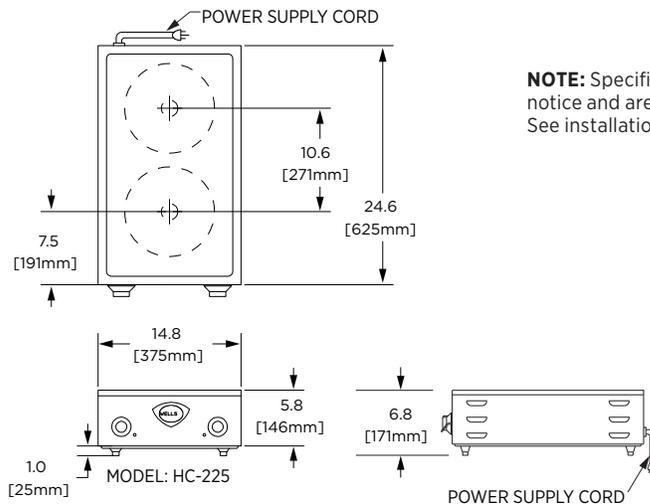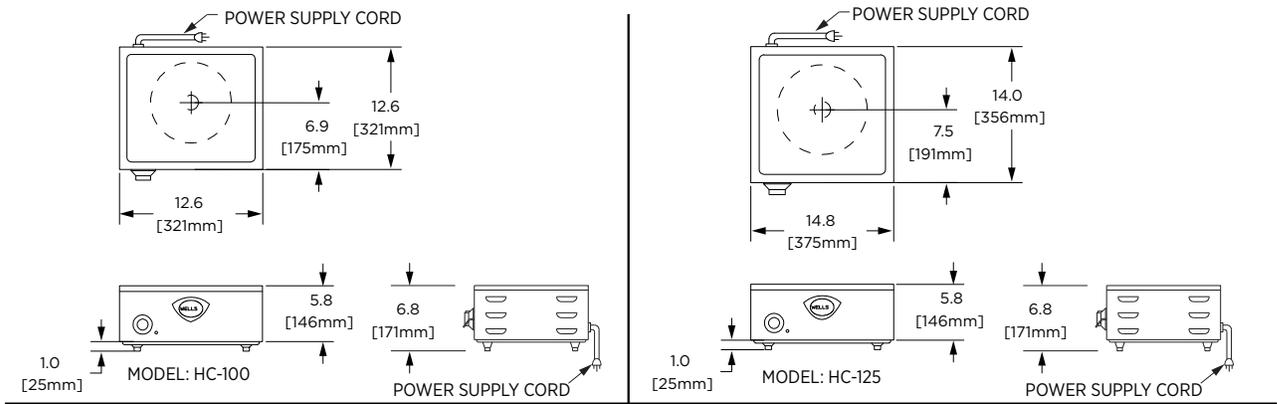

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

SK3208 REV - (10-23)

MODEL	WIDTH in. (mm)	DEPTH in. (mm)	HEIGHT* in. (mm)	TEMP. SETTINGS	VOLTS	WATTS	PHASE	AMPS	PLUG	APPROX. SHIP WEIGHT	APPROX. INSTALL WEIGHT
HC-100	12.6 (321)	12.6 (321)	6.8 (171)	OFF/LO to HI	120	1400	1Ø	11.7	5-15P	15 lb. (7 kg)	12 lb. (5 kg)
HC-125	14.8 (375)	14 (356)	6.8 (171)	OFF/LO to HI	208	1900	1Ø	9.0	6-15P	16 lb. (7 kg)	13 lb (6 kg)
					240	2500	1Ø	10.4	6-15P		
HC-125EU	14.8 (375)	14 (356)	6.8 (171)	OFF/LO to HI	220-240	2500	1Ø	10.4	SUPPLIED	26 lb. (12 kg)	23 lb. (10 kg)
HC-225	14.8 (375)	24.6 (625)	6.8 (171)	OFF/LO to HI	208	3800	1Ø	18.1	6-30P		
					240	5000	1Ø	20.8	6-30P		

*Height includes 1" legs

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

