



Job _____ Item No. _____

WELLS MODEL: SS4 Series 4-Quart Heavy Duty, Top-Mount, Round, Drop-In Food-Warmers



UL LISTED MODEL shown
*CONDUIT AND ENCLOSED CONTROL
BOX ONLY ON UL LISTED MODELS

DESCRIPTION

Wells heavy-duty, top-mount, drop-in, round food warmers are designed to hold heated foods at safe and fresh serving temperatures. Wells SS4 Series accommodates standard 4-quart round inset pans, and are designed for wet or dry operation.

WARRANTY

These units come with a one [1] year warranty for parts and labor.

OPTIONS & ACCESSORIES

- 120V or 208/240V
- Drains
- Cord & plugs
- Fully insulated models or standard models
- Infinite or thermostatic controls
- 72" Wiring (Thermostatic Only) Per Well - Add Suffix 6

SPECIFICATIONS

Construction - One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellsloks™ are standard for quick and easy installation.

Insulation - Choose between models that are fully insulated around the sides and bottom or standard non-insulated models. Fully Insulated models save energy and may be installed in nonmetal counters.

Controls & Heating- Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

STANDARD FEATURES

- Accommodates standard 4-quart insets
- One-piece stainless steel top flange and heavy-gauge, deep drawn
- Stainless steel warming pans
- Suitable for wet or dry operation
- Energy-Saving fully-insulated models or standard non-insulated models
- Fully Insulated models are perfect for non-metal counters (with adapter kit)
- Thermostatic or infinite controls
- High limits prevent overheating
- Infinite controls provided with guard ring to prevent accidental temperature change
- Thermostatic controls are recessed in a one-piece, drawn, front-mounted panel
- Wellslock standard for ease of installation
- Powerful tubular heating elements
- ½" drains available
- Cords & plugs available
- 1-Year limited parts & 1-Year limited labor warranty

**ONLY UL LISTED MODELS COME WITH
CONDUIT AND ENCLOSED CONTROL BOX**

CERTIFICATIONS






WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com

Printed in the U.S.A. • 2M-Z22654 REV D (09-23)
Specifications are subject to change without notice
and are not intended for installation purposes.



WELLS MODEL: SS4 Series 4-Quart Heavy Duty, Top-Mount, Round, Drop-In, Food-Warmers

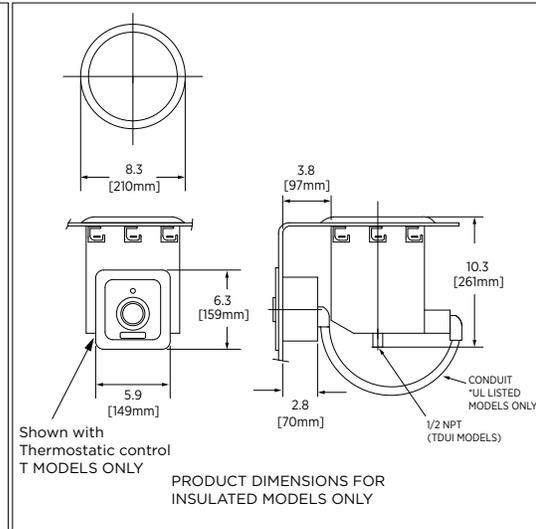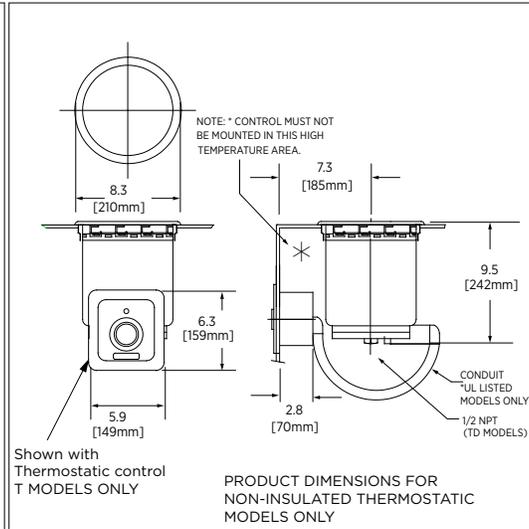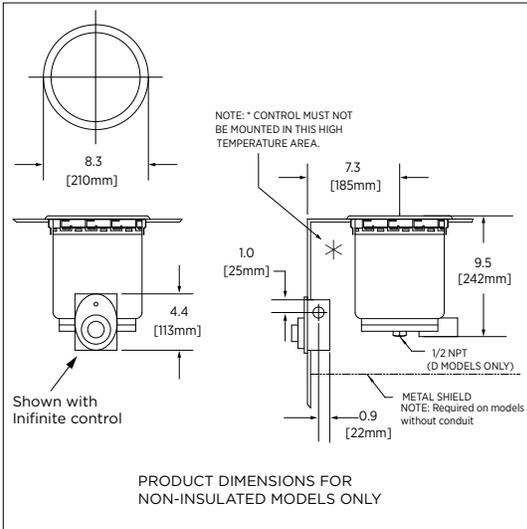

SK3199 REV - (09-23)

MODEL	Description/Controls	WIDTH in. (mm)	APPROX. INSTALL WEIGHT	APPROX. SHIP WEIGHT	VOLTS	WATTS	PHASE	Cord & Plug	Plug	Drain	Approvals
SS4D-120	Infinite	Non-Insulated	5 lb. (2.3 kg)	6 lb. (2.8 kg)	120V	450	1Ø	No	N/A	Yes	c us
SS4TU-120	Thermostatic	Non-Insulated	5 lb. (2.3 kg)	6 lb. (2.8 kg)	120V	825	1Ø	No	N/A	No	c us
SS4TDU-120	Thermostatic	Non-Insulated	5 lb. (2.3 kg)	6 lb. (2.8 kg)	120V	825	1Ø	No	N/A	Yes	c us
SS4TDU	Thermostatic	Non-Insulated	5 lb. (2.3 kg)	6 lb. (2.8 kg)	208V 240V	620 825	1Ø	No	N/A	Yes	c us
SS4TUC	Thermostatic	Non-Insulated	5 lb. (2.3 kg)	6 lb. (2.8 kg)	208V 240V	620 825	1Ø	Yes	NEMA 6-15P	No	c us
SS4TUCI-120	Thermostatic	Fully Insulated	8.6 lb. (3.9 kg)	9.6 lb. (4.4 kg)	120V	825	1Ø	Yes	NEMA 5-15P	No	c us

MODELS	BACK in. (mm)	SIDE in. (mm)	BOTTOM in. (mm)	FRONT in. (mm)
Non-insulated	1 (25)	1 (25)	8 1/2 (216)	4* (102)
Fully insulated	1 (25)	1 (25)	8 (203)	4 (102)

When control box is located below the warmer, front clearance may be reduced to 2" (52mm).

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com

Printed in the U.S.A. • 2M-Z22654 REV D (09-23)
Specifications are subject to change without notice
and are not intended for installation purposes.