



HIGH TEMPERATURE SINGLE RACK POT WASHER

PT-15

High Temperature
Pot Washer



FEATURES

- 4 Cycles; 5 minute, 6 minute, 8 minute & 10 minute.
- Fully automatic cycle for easy operation.
- 5" touch display constantly informs user of machine status. Controls are easy to understand and simple to operate.
- Double skin for quiet operation.
- Auto start/stop makes operation safe and easy.
- Integrated scrap tray.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- Pumped final rinse.
- Stainless Steel scrap tray, long lasting.
- Unique spray arm system features upper and lower stainless steel wash arms.
- Large 31-3/4" height accommodates large pots and sheet pans.
- Includes 21-3/4" X 26-1/4" stainless steel rack.
- Uses 1.1 gallons per cycle.
- Standard gravity drain.






PT-15

High Temperature
Single Rack Pot Washer

WARNINGS:

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

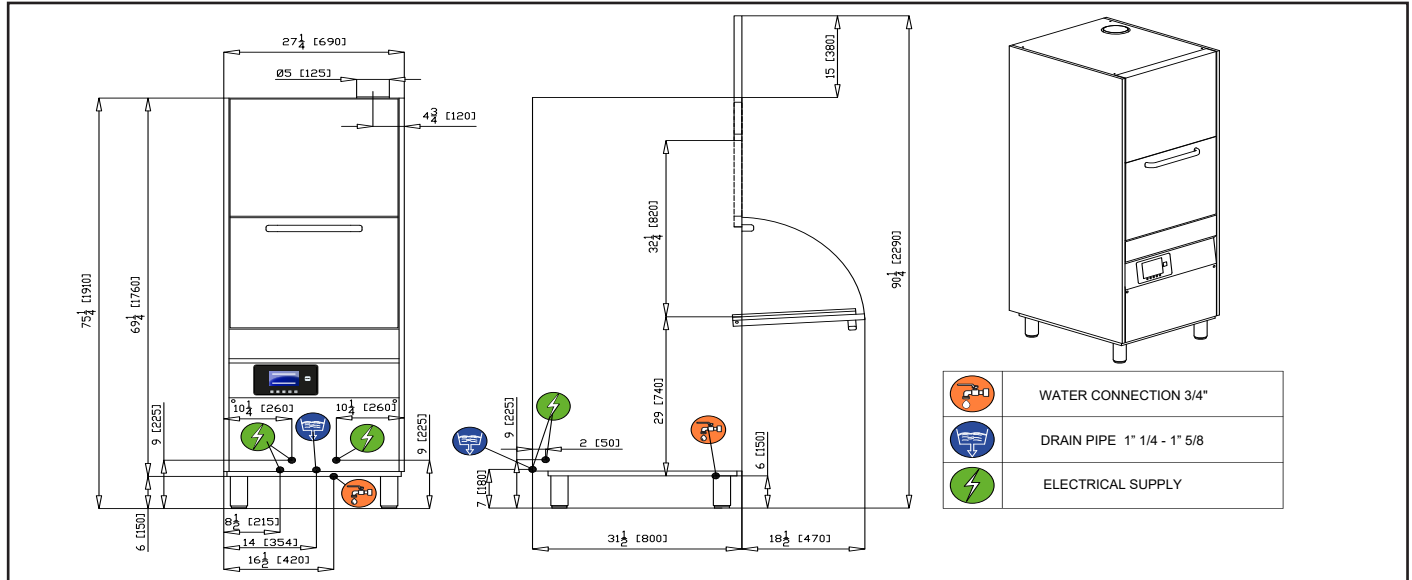

Specifications:

MODEL PT-15	USA	METRIC	USA	METRIC
WATER CONSUMPTION				
PER RACK	1.1 GAL	4.2 L		
12 Racks per hour	13.2 GAL	50.0 L		
10 Racks per hour	11.0 GAL	41.6 L		
7 Racks per hour	7.7 GAL	29.1 L		
6 Racks per hour	6.6 GAL	25.0 L		
OPERATING CAPACITY				
RACKS PER HOUR	12/10/7/6	12/10/7/6		
WASH TANK CAPACITY	13.2 GAL	50.0 L		
PUMP CAPACITY	250 GPM	950 LPM		
WATER REQUIREMENTS				
WATER INLET	3/4"	1.9cm		
DRAIN CONNECTION	2"	5.1cm		
OPERATING TEMPERATURE				
WASH-°F (MIN)	165°F	71°C		
RINSE-°F (MIN)	185°F	85°C		
DIMENSIONS				
DEPTH	31-1/2"	80.0cm		
WIDTH (OUTSIDE DIMENSION)	27-1/4"	69.0cm		
TOTAL HEIGHT WITH DOOR OPEN	90-1/4"	229.0cm		
MAX CLEARANCE FOR DISHES	31-3/4"	80.5cm		
DRAIN CONNECTION (OFF FLOOR)	6"	15.2cm		
DISHRACK DIMENSIONS	21-3/4" x 26-1/4"	55.0 x 66.5cm		
ELECTRICAL RATING	VOLTS	PHASE	AMPS	
WITH BOOSTER	208 240	3 3	32.2 35.3	
APPROXIMATE SHIPPING WEIGHT	475#			
SHIPPING DIMENSIONS	PALLET & BOX @ 45" X 40" X 77"			

Summary Specifications: Model PT-15

The model PT-15 single tank, high temperature pot washer is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. The PT-15 is NSF, UL, CUL approved. Constructed of stainless steel.

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 01-2025 CMA, Inc.

