

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

### HBF BOTTOM MOUNT REACH-IN FREEZERS

MODEL: HBF72HC-5

HBF72HC Solid Door Bottom Mount Freezer Hydrocarbon Series



HBF72HC-5

#### **OPTIONS & ACCESSORIES**

- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (ÁC)
- 3" caster or 6" legs
- **Epoxy shelves**
- Shelf clips
- Remote option

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front, side, and grille (galvanized back & bottom)
- Stainless steel interior
- Full electronic control with one-touch defrost
- Expansion valve technology
- One -piece grille allow easy removal/installation for preventative maintenance
- Door locks (solid doors only)
- Self closing doors with 120° stay open feature
- Spring-loaded style hinges
- Plug-in magnetic door gaskets
- Anti-microbial door handles
- Nine (9) heavy duty epoxy coated wire shelves
- LED lighting standard
- 6" Casters standard with two (2) brakes
- Maintains product temperatures of 0° F and below

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, electric defrost
- Epoxy coated evaporator coil


















MODEL	HBF72HC-5
EXTERNAL DIMENSIONAL DATA	
Width Overall	75"
Depth Overall with Handle	33 3/4"
Height Overall with 6" Casters	84 1/4"
Number of Doors	3
Depth with Door Open 90°	55 1/8"
Door Opening (in)	21 3/4" x 52 5/8" (2) 21 7/8" x 52 5/8" (Center)
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	68.5
Internal Width Overall (in)	72"
Internal Depth Overall (in)	26"
Internal Height Overall ( in)	61 5/8"
Internal Height Useable ( in)	53"
Number of Shelves	9
ELECTRICAL DATA	
Full Load Amperes 208-230/115	14
REFRIGERATION DATA	
Horsepower	(2) 3/4
Capacity (BTU/Hr)*	4624
WEIGHT DATA	
Gross Weight (Crated lbs)	758 lbs
Height - Crated	85"
Width - Crated	77"
Depth - Crated	36"

## **Bottom Mount Reach-ins Freezer** Model: HBF72HC-5

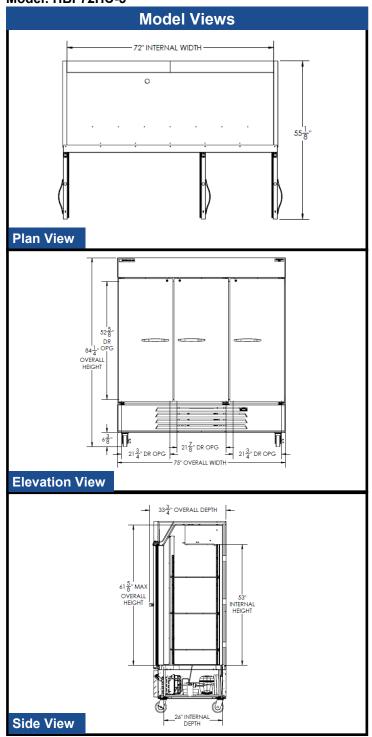

















Units pre-wired at factory and include 8' long cord and plug set.



