



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **IRR-AGN602BT**

REACH-IN:
Slimline Reach-in Freezers



General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODEL	Dimensions (inches) (mm)			N° Doors	N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGN602BT	38-3/8	27-3/8	83	2	6	R404a	0.99	-5°F/0°F	27	3/4	12.3	377
	975	695	2100				450	-20°C/-18°C	765			171

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
7042 N.W. 46th Street
Miami, FL 33166
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT:

Revision: 04 Date: 05/07/2015 AGN602BT_FT_62.4



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **IRR-AGN602BT**

REACH-IN:
Slimline Reach-in Freezers

STANDARD FEATURES

➤ Exterior

- AISI 304 Stainless Steel,
- Completely injected compact structure.

➤ Interior

- AISI 304 Stainless Steel,
- Wide rounded corners to aid cleaning,
- LED lighting,
- Internal drain.

➤ Doors

- Self closing with stay open feature,
- Integrated door handles,
- AISI 430 Stainless Steel covered hinges,
- Triple chamber snap in door seals for easy removal,
- Door lock provided,
- Full-height door opening: 14-3/4"x58-7/8" (375x1500 mm).

OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf.
- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230V / 1ph / 50 Hz (plug type varies).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ Shelving

- (3) Plastic coated wire shelves per door,
- Set of Stainless Steel rails per shelf included,
- Dimensions WxD: 12-3/4"x20-7/8" (324x530 mm),
- Compatible with 12"x20" (305x508 mm) sheet pans.

➤ Casters

- 4" diameter casters,
- Locks provided on front set.

➤ Refrigeration

- Temperature and defrost regulated by a digital controller,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material,
- Low temp with expansion valve and hot gas defrost system (BT),
- **Heated door frame to avoid accumulation of ice,**
- Refrigeration capacity: 5043 Btu/h(-22°F)/1478W (-30°C).

➤ Electrical


- Cord and NEMA 5-20P plug,
- Electrical connection is 115V / 1ph / 60 Hz.




- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW


ELEVATION

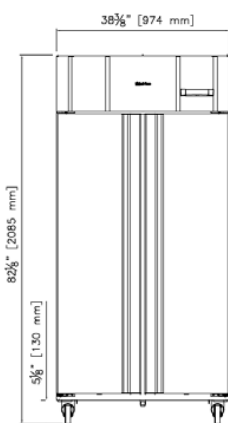

RIGHT VIEW

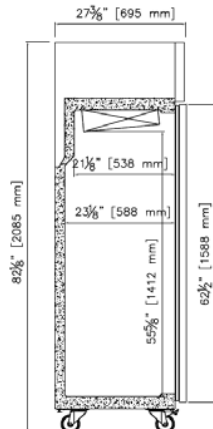

PLAN VIEW



ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
7042 N.W. 46th Street
Miami, FL 33166
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT: