

Project _____

Item Number _____

Quantity _____

Multi-Purpose Oven



*Shown with stand

Multi-Purpose Oven

Models:

- MP4TE - 4 Tray
- MP6TE - 6 Tray
- MP10TE - 10 Tray



Multi-Purpose

Features:

- Touch screen control panel with multiple user programs
- Internal lighting for easy product viewing
- Baking chamber is made in stainless steel and features rounded corners for easier cleaning and better air flow
- Comes with 1 core probe
- Double glass panel with low heat emission and easy disconnect for easy cleaning
- Carbon fiber handle is light and strong
- Reversing motors with heat resistant bearings
- Doors feature condensation catching trays
- Convection baking from 158 to 518° fahrenheit (70 to 270° celsius)
- Steam baking from 158 to 266° fahrenheit (70 to 130° celsius)
- Multiple cooking methods: steam, convection, dry, and probe

Optional Accessories:

- Stand
- Multi-point probe
- External probe for vacuum
- Automatic washing system

Univex Corporation

Tray Size:


18x26" (45.7x66cm)

Warranty:

- One year, on-site parts and labor


Multi-Purpose Oven

ELECTRIC

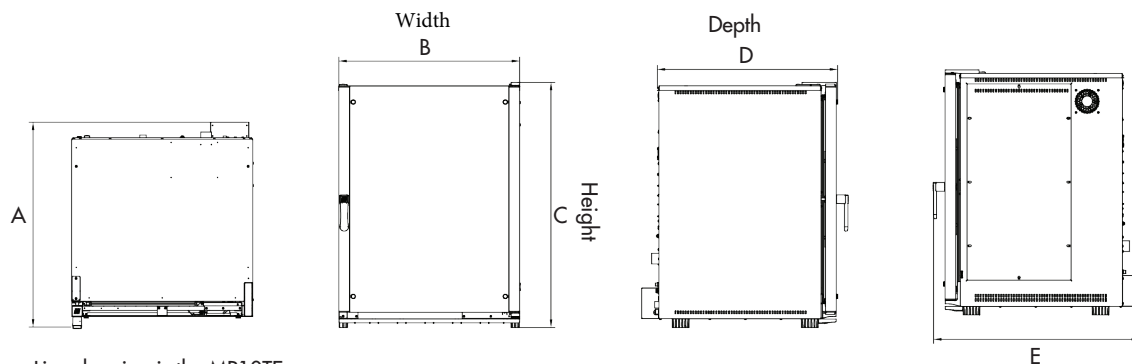

Line drawing is the MP10TE

| | MP4TE | MP6TE | MP10TE |
|---|----------------|-----------------|------------------|
| A | 36.5" (92.5cm) | 36.5" (92.5cm) | 57.75" (146.5cm) |
| B | 33.5" (85cm) | 33.5" (85cm) | 33.5" (85cm) |
| C | 26.4" (66.7cm) | 32.75" (82.9cm) | 45.5" (115.57cm) |
| D | 36.5" (93cm) | 36.5" (93cm) | 36.5" (93cm) |
| E | 36.5" (92.6cm) | 36.5" (92.5cm) | 57.75" (146.4cm) |

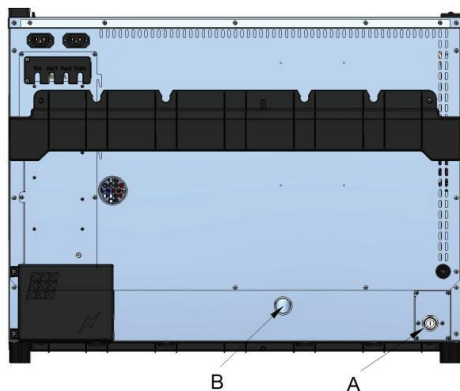

A: Water Inlet 3/4" (1.9cm)
 B: Water Drain 1 1/4" (3cm)

If washing system is in place,
 there is another water connection.

* The water needs to be filtered and
 softened with a hardness of 3.5 - 7 G/Gal

Minimum clearance away from the wall: left side-2" (5cm), right side-4" (10cm), rear-6" (15cm)

Distance needed away from wall to be cleaned and serviced: 20" (50.8cm)

Optional Stand Height: 13.8" (35cm), 26.8 (68cm)", 39.4" (100cm)

Water PSI: 7-43

| Oven Weight | |
|-------------|-------------------|
| MP4TE | 143.3lbs. (65kg) |
| MP6TE | 180.8lbs. (82kg) |
| MP10TE | 242.5lbs. (110kg) |

| Electrical Information (60Hz) | | |
|-------------------------------|-----------------------------|------------------------|
| Model | Standard Voltage/Phase/Amps | Optional Voltage/Phase |
| MP4TE | 208-240/3/33 | 400/3 |
| MP6TE | 208-240/3/43.7 | 400/3 |
| MP10TE | 208-240/3/66 | 400/3 |