Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

CORE SERIES SX24 RANGE

24" Range with 4 Open Burners



Model SX24-4B

Note: Image is for illustration purposes only and may not reflect actual unit.

MODELS

- ❑ **SX24-4BN** 1 Standard Oven / Natural Gas
- ❑ **SX24-4BP** 1 Standard Oven / Propane

STANDARD FEATURES

- Stainless steel front, sides, backriser, lift-off high shelf
- 6" stainless steel adjustable legs
- 28,000 BTU/hr open top burners with lift-off heads
- Shrouded flash tube pilot system (one pilot per two burners)
- 12" x 12" cast top grates with aeration bowls
- 30,000 BTU/hr standard oven cavity measures 20.6" W x 25.5" D x 13.7" H
- Oven thermostat adjusts from 250° to 500°F
- One oven rack and four rack positions
- ¾" rear gas connection and gas pressure regulator
- One year limited parts and labor warranty

ACCESSORIES *(packaged & sold separately)*

- ❑ Extra oven rack.
- ❑ Reinforced backriser and high shelf for mounting salamander broiler.
- ❑ Set of four casters (two locking).

SPECIFIER STATEMENT

Vulcan Core Series 24" wide light-duty range, Model No. SX24-4B. Stainless steel front, sides, backriser, high shelf and bullnose. High temperature burner T knobs with set screw. Porcelain door liner and oven bottom. Four 28,000 BTU/hr. cast top burners with lift-off burner heads. Shrouded flash tube pilot system (one pilot per two burners). 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 30,000 BTU/hr. Standard oven measures 20.6" W x 25.5" D x 13.7" H. Thermostat adjusts from 250° to 500°F. One oven rack with four rack positions. ¾" rear gas connection and gas pressure regulator. Total input: 142,000 BTH/hr.

Exterior Dimensions:

24"W x 32.5"D x 54.5"H on 6" adjustable legs


Intertek

CORE SERIES - SX24 - 24" RANGE WITH 4 OPEN BURNERS

Approved by_____ Date_____ Approved by_____ Date_____

CORE SERIES - SX24 RANGE

24" Range with 4 Open Burners

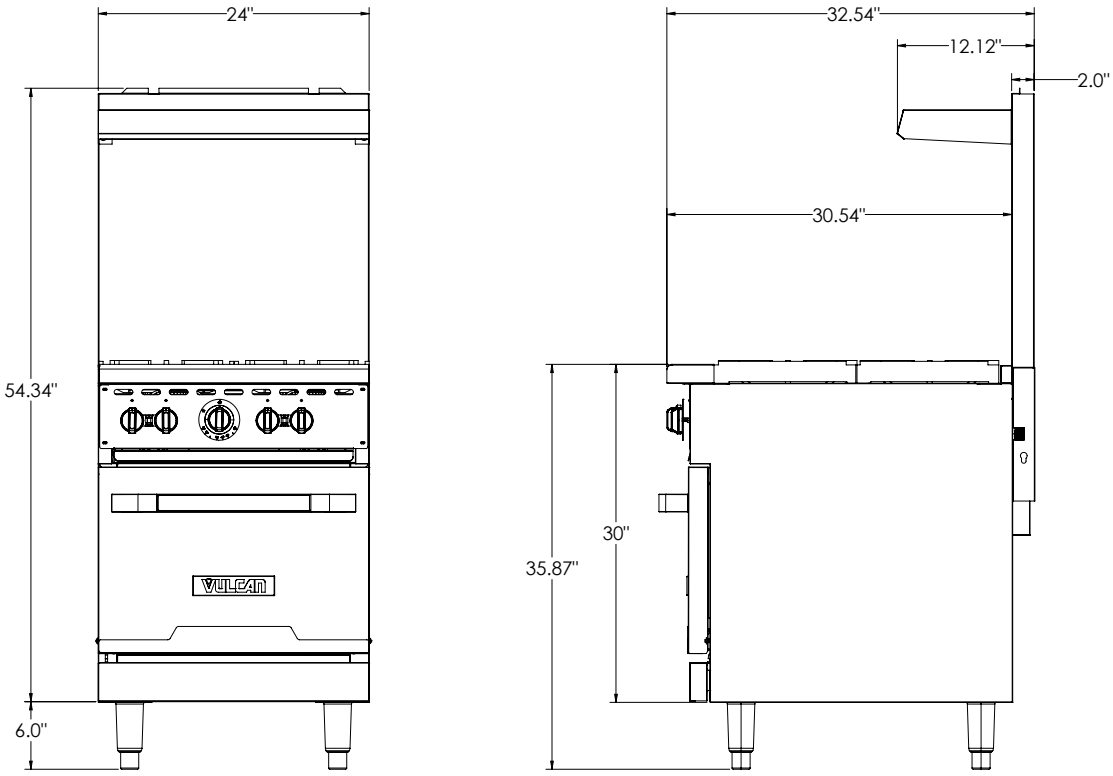

Gas Pressure


Natural Gas: 5.0" (127mm) W.C.
Propane Gas: 10.0" (254 mm) W.C.

A gas pressure regulator supplied with the unit must be installed.

Gas line connecting to appliance must be 3/4" diameter or larger. If flexible connectors are used, the inside diameter must be the same as the 3/4" iron pipe.

Specify type of gas when ordering.
Specify altitude when above 2,000 feet.

Clearances	Combustible	Non-Combustible
Rear	6"	4"
Right Side	10"	0"
Left Side	10"	0"

Top Configuration	Model	Description	Total Input BTU / Hr.	Shipping Dimensions (W x D x H)	Shipping Weight Lbs. / KG
	**SX24-4BN**	1 Standard Oven 4 Burners / Natural Gas	142,000	28" W x 40" D x 35" H	351 lbs / 160 kg
	SX24-4BP	1 Standard Oven 4 Burners / Propane	142,000	28" W x 40" D x 35" H	351 lbs / 160 kg

This appliance is manufactured for commercial use only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.