RWN-1, RWN-2, RWN-3 BUILT-IN NARROW DRAWER WARMERS



Specifications

•				
Overall Dimensions:	Inches	MM		
Width	20 1/4	514		
Depth	21 1/2	546		
Height (incl. 4" legs & splashguard)				
RWN-1 series	14 7/8	378		
RWN-2 series	25	635		
Height (no legs)	711/0	701		
RWN-3 series	31 1/8	791		
Temperature Range:	Fahrenheit	Celsius		
RWN series	90° to 210°	32° to 99°		
Pre-Heat Time to 175° F:	120V & 240	V 208V		
RW series	15 minutes	22 minutes		
Typical Capacity:	Dinner Rolls			
Individual drawer	Appox. 8 doz.			
Weights:	Lbs.	KG		
RWN-1 series: Installed Shipping	59 71	27 32		
RWN-2 series: Installed Shipping	106 121	48 55		
RWN-3 series: Installed Shipping	147 183	67 83		

Wells Narrow Drawer Warmers can keep a variety of foods hot and ready to serve. Their narrow width saves valuable space, yet the drawers accept all standard 12" x 20" pans up to 6" deep. All Wells warmers come with individual controls on each drawer for temperature and humidity, allowing food to be hot and crispy in one drawer, warm and moist in another.

Features

- Narrow width saves space while accommodating standard 12"x20" pans.
- Exclusive self-latching mechanism provides easy, one-touch, secure closure.
- Individual thermostatic temperature control on each drawer gives these warmers maximum versatility.
- Durable stainless steel tracks and bearings provide smooth, trouble-free operation.
- Adjustable front vent on each drawer allows for humidity control.
- A stainless steel pan is provided with each drawer warmer and is capable of holding a standard 12" x 20" pan.
- Fully insulated for maximum efficiency.
- Models with optional built-in thermometer (T) are NSF approved for potentially hazardous foods.
- The RWN series Drawer Warmers are Underwriters Laboratories, Inc. LISTED and meet the NSF International and Canadian standards.
- A one-year warranty against defects covers parts and labor.

Accessories / Options

Stainless Steel Replacement Pan, for all narrow drawer warmers, 22228

Optional Built-in Thermometer (T), for individual drawers, contact factory

Caster Kit, 10" high casters, set of four, with two front brakes, 21034

Caster Kit, 3 1/2" high casters, set of four, all with brakes, 22201

Leg Kit, 6", set of four, metal, 20576


WELLS

WELLS MANUFACTURING



DIMENSIONS:

INCH (MM)

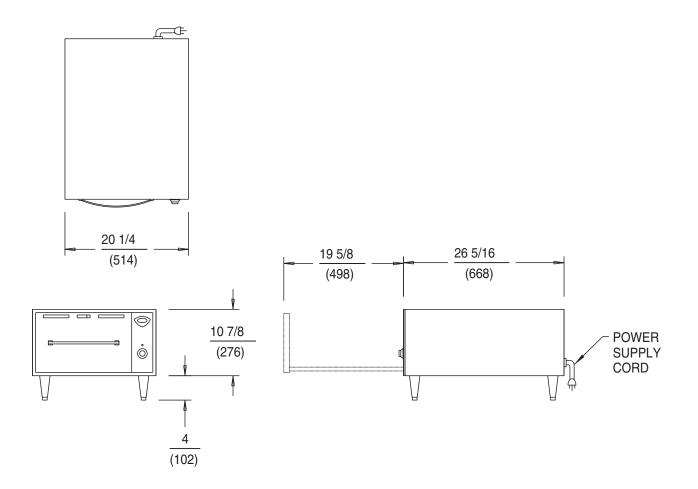

RWN-1, RWNT-1 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-1	120	450	3.8	SINGLE	NEMA 5-15P
RWN-1	208	338	1.6	SINGLE	NEMA 6-15P
RWN-1	240	450	1.9	SINGLE	NEMA 6-15P

* RWNT-1 models are provided with a thermometer and have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice.


WELLS MANUFACTURING



DIMENSIONS:

MODEL RWN-2, RWNT-2 NARROW DRAWER WARMERS

INCH (MM)

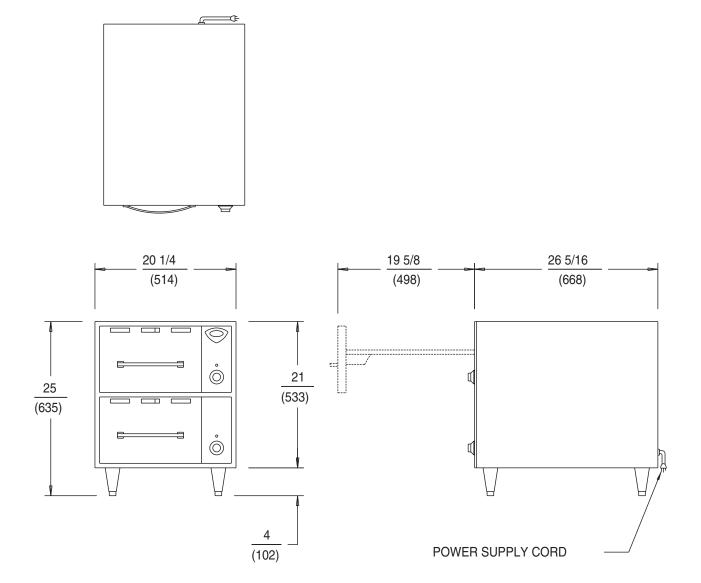


RWN-2, RWNT-2 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-2	120	900	7.5	SINGLE	NEMA 5-15P
RWN-2	208	676	3.3	SINGLE	NEMA 6-15P
RWN-2	240	900	3.8	SINGLE	NEMA 6-15P

* RWNT-2 models are provided with a thermometer and have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice.

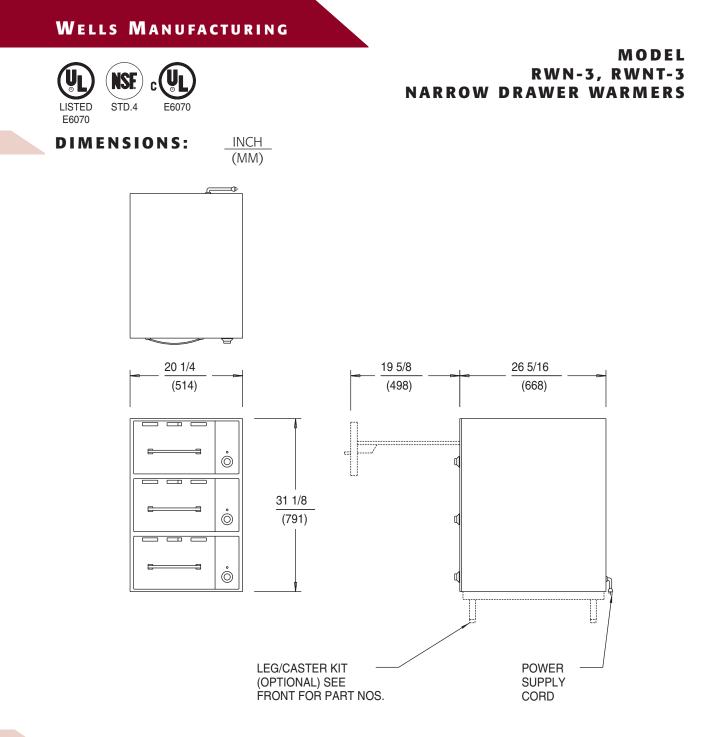

RWN-3, RWNT-3 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-3	120	1350	11.3	SINGLE	NEMA 5-15P
RWN-3	208	1014	4.9	SINGLE	NEMA 6-15P
RWN-3	240	1350	5.6	SINGLE	NEMA 6-15P

* RWNT-3 models are provided with a thermometer and have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice.

 WELLS MANUFACTURING COMPANY

 2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A.

 USA PHONE: (775) 689-5700• FAX: (775) 689-5972

 FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142

 www.wellsbloomfield.com

 © 2002 WELLS MANUFACTURING • PRINTED IN THE U.S.A.

 02/02 • REV(F) • PART NO. 37116

